

# MPCxxx Instruction Set

This chapter lists the MPCxxx instruction set in alphabetical order by *mnemonic*. Note that each entry includes the instruction formats and a quick reference 'legend' that provides such information as the level(s) of the PowerPC architecture in which the instruction may be found—*user instruction set architecture (UISA)*, *virtual environment architecture (VEA)*, and *operating environment architecture (OEA)*; and the privilege level of the instruction—user- or supervisor-level (an instruction is assumed to be user-level unless the legend specifies that it is supervisor-level); and the instruction formats. The format diagrams show, horizontally, all valid combinations of instruction fields.

Note that the *architecture* specification refers to user-level and supervisor-level as problem state and privileged state, respectively.

## Instruction Formats

Instructions are four bytes long and *word*-aligned, so when instruction addresses are presented to the processor (as in branch instructions) the two low-order bits are ignored. Similarly, whenever the processor develops an instruction address, its two low-order bits are zero. Bits 0–5 always specify the *primary opcode*. Many instructions also have an *extended opcode*. The remaining bits of the instruction contain one or more fields for the different instruction formats.

Some instruction fields are reserved or must contain a predefined value as shown in the individual instruction layouts. If a *reserved field* does not have all bits *cleared*, or if a field that must contain a particular value does not contain that value, the instruction form is invalid.

## Split-Field Notation

Some instruction fields occupy more than one contiguous sequence of bits or occupy a contiguous sequence of bits used in permuted order. Such a field is called a split field. Split fields that represent the concatenation of the sequences from left to right are shown in lowercase letters. These split fields—*spr<sub>±</sub>* and *tbr*—are described in Table 1.

**Table 1. Split-Field Notation and Conventions**

Field	Description
spr (11–20)	This field is used to specify a special-purpose register for the <b>mtspr</b> and <b>mfspir</b> instructions.
tbr (11–20)	This field is used to specify either the time base lower (TBL) or time base upper (TBU).

Split fields that represent the concatenation of the sequences in some order, which need not be left to right (as described for each affected instruction) are shown in uppercase letters. These split fields—MB, ME, and SH—are described in Table 2.

## Instruction Fields

Table 2 describes the instruction fields used in the various instruction formats.

**Table 2. Instruction Syntax Conventions**

Field	Description
AA (30)	<p>Absolute address bit.</p> <p>0 The immediate field represents an address relative to the current instruction address (CIA). The effective (logical) address of the branch is either the sum of the LI field sign-extended to <u>32</u> bits and the address of the branch instruction or the sum of the BD field sign-extended to <u>32</u> bits and the address of the branch instruction.</p> <p>1 The immediate field represents an absolute address. The effective address (EA) of the branch is the LI field sign-extended to <u>32</u> bits or the BD field sign-extended to <u>32</u> bits.</p> <p><b>Note:</b> The LI and BD fields are sign-extended to <u>32</u>.</p>
BD (16–29)	Immediate field specifying a 14-bit signed two's complement branch displacement that is concatenated on the right with 0b00 and sign-extended to <u>32</u> bits.
BI (11–15)	This field is used to specify a bit in the CR to be used as the condition of a branch conditional instruction.
BO (6–10)	This field is used to specify options for the branch conditional instructions.
crbA (11–15)	This field is used to specify a bit in the CR to be used as a source.
crbB (16–20)	This field is used to specify a bit in the CR to be used as a source.
CRM (12–19)	This field mask is used to identify the CR fields that are to be updated by the <b>mtcrf</b> instruction.
d (16–31)	Immediate field specifying a 16-bit signed two's complement integer that is sign-extended to <u>32</u> bits.
frC (21–25)	NOT USED BY MPCxxx.
frD (6–10)	NOT USED BY MPCxxx.
frS (6–10)	NOT USED BY MPCxxx.
IMM (16–19)	NOT USED BY MPCxxx.
LI (6–29)	Immediate field specifying a 24-bit signed two's complement integer that is concatenated on the right with 0b00 and sign-extended to <u>32</u> bits.
LK (31)	<p>Link bit.</p> <p>0 Does not update the link register (LR).</p> <p>1 Updates the LR. If the instruction is a branch instruction, the address of the instruction following the branch instruction is placed into the LR.</p>
MB (21–25) and ME (26–30)	These fields are used in rotate instructions to specify a <u>32</u> -bit mask.
NB (16–20)	This field is used to specify the number of bytes to move in an immediate string load or store.
OE (21)	This field is used for extended arithmetic to enable setting OV and SO in the XER.
OPCD (0–5)	Primary opcode field

**Table 2. Instruction Syntax Conventions (Continued)**

Field	Description
<i>rA</i> (11–15)	This field is used to specify a GPR to be used as a source or destination.
<i>rB</i> (16–20)	This field is used to specify a GPR to be used as a source.
Rc (31)	<i>Record bit.</i> 0 Does not update the condition register (CR). 1 Updates the CR to reflect the result of the operation. For integer instructions, CR bits 0–2 are <i>set</i> to reflect the result as a signed quantity and CR bit 3 receives a copy of the summary overflow bit, XER[SO]. The result as an unsigned quantity or a bit string can be deduced from the EQ bit. (Note that exceptions are referred to as interrupts in the architecture specification.)
<i>rD</i> (6–10)	This field is used to specify a GPR to be used as a destination.
<i>rS</i> (6–10)	This field is used to specify a GPR to be used as a source.
SH (16–20)	This field is used to specify a shift amount.
SIMM (16–31)	This immediate field is used to specify a 16-bit signed integer.
TO (6–10)	This field is used to specify the conditions on which to trap.
UIMM (16–31)	This immediate field is used to specify a 16-bit unsigned integer.
XO (21–30, 22–30, 26–30)	Extended opcode field.

## Notation and Conventions

The operation of some instructions is described by a semiformal language (pseudocode). See Table 3 for a list of pseudocode notation and conventions used throughout this chapter.

**Table 3. Notation and Conventions**

Notation/Convention	Meaning
←	Assignment
← <sub>iea</sub>	Assignment of an instruction effective address.
¬	NOT logical operator
*	Multiplication
÷	Division (yielding quotient)
+	Two's-complement addition
–	Two's-complement subtraction, unary minus
=, ≠	Equals and Not Equals relations
<, ≤, >, ≥	Signed comparison relations
. (period)	Update. When used as a character of an instruction mnemonic, a period (.) means that the instruction updates the condition register field.

**Table 3. Notation and Conventions (Continued)**

Notation/Convention	Meaning
c	Carry. When used as a character of an instruction mnemonic, a 'c' indicates a carry out in XER[CA].
e	Extended Precision. When used as the last character of an instruction mnemonic, an 'e' indicates the use of XER[CA] as an operand in the instruction and records a carry out in XER[CA].
o	Overflow. When used as a character of an instruction mnemonic, an 'o' indicates the record of an overflow in XER[OV] and CR0[SO] for integer instructions.
<U, >U	Unsigned comparison relations
?	Unordered comparison relation
&,	AND, OR logical operators
	Used to describe the concatenation of two values (that is, 010    111 is the same as 010111)
⊕, ≡	Exclusive-OR, Equivalence logical operators (for example, $(a \equiv b) = (a \oplus \neg b)$ )
0bnnnn	A number expressed in binary format.
0xnxxx	A number expressed in hexadecimal format.
(n)x	The replication of x, n times (that is, x concatenated to itself n – 1 times). (n)0 and (n)1 are special cases. A description of the special cases follows: <ul style="list-style-type: none"> <li>• (n)0 means a field of n bits with each bit equal to 0. Thus (5)0 is equivalent to 0b00000.</li> <li>• (n)1 means a field of n bits with each bit equal to 1. Thus (5)1 is equivalent to 0b11111.</li> </ul>
(rA)0	The contents of rA if the rA field has the value 1–31, or the value 0 if the rA field is 0.
(rX)	The contents of rX
x[n]	n is a bit or field within x, where x is a register
x <sup>n</sup>	x is raised to the nth power
ABS(x)	Absolute value of x
CEIL(x)	Least integer ≥ x
Characterization	Reference to the setting of status bits in a standard way that is explained in the text.
CIA	Current instruction address. The 32-bit address of the instruction being described by a sequence of pseudocode. Used by relative branches to set the next instruction address (NIA) and by branch instructions with LK = 1 to set the link register. Does not correspond to any architected register.
Clear	Clear the leftmost or rightmost n bits of a register to 0. This operation is used for rotate and shift instructions.
Clear left and shift left	Clear the leftmost b bits of a register, then shift the register left by n bits. This operation can be used to scale a known non-negative array index by the width of an element. These operations are used for rotate and shift instructions.
Cleared	Bits are set to 0.

**Table 3. Notation and Conventions (Continued)**

Notation/Convention	Meaning
Do	Do loop. <ul style="list-style-type: none"> <li>• Indenting shows range.</li> <li>• “To” and/or “by” clauses specify incrementing an iteration variable.</li> <li>• “While” clauses give termination conditions.</li> </ul>
Extract	Select a field of $n$ bits starting at bit position $b$ in the source register, right or left justify this field in the target register, and clear all other bits of the target register to zero. This operation is used for rotate and shift instructions.
EXTS(x)	Result of extending $x$ on the left with sign bits
GPR(x)	<i>General-purpose register x</i>
if...then...else...	Conditional execution, indenting shows range, else is optional.
Insert	Select a field of $n$ bits in the source register, insert this field starting at bit position $b$ of the target register, and leave other bits of the target register unchanged. (No <i>simplified mnemonic</i> is provided for insertion of a field when operating on double words; such an insertion requires more than one instruction.) This operation is used for rotate and shift instructions. (Note that simplified mnemonics are referred to as extended mnemonics in the architecture specification.)
Leave	Leave innermost do loop, or the do loop described in leave statement.
MASK(x, y)	Mask having ones in positions $x$ through $y$ (wrapping if $x > y$ ) and zeros elsewhere.
MEM(x, y)	Contents of $y$ bytes of memory starting at address $x$ .
NIA	Next instruction address, which is the 32-bit address of the next instruction to be executed (the branch destination) after a successful branch. In pseudocode, a successful branch is indicated by assigning a value to NIA. For instructions which do not branch, the next instruction address is CIA + 4. Does not correspond to any architected register.
OEA	PowerPC operating environment architecture
Rotate	Rotate the contents of a register right or left $n$ bits without masking. This operation is used for rotate and shift instructions.
Set	Bits are set to 1.
Shift	Shift the contents of a register right or left $n$ bits, clearing vacated bits (logical shift). This operation is used for rotate and shift instructions.
SPR(x)	Special-purpose register $x$
TRAP	Invoke the system trap handler.
Undefined	An undefined value. The value may vary from one implementation to another, and from one execution to another on the same implementation.
UISA	PowerPC user instruction set architecture
VEA	PowerPC virtual environment architecture

Table 4 describes instruction field notation conventions used throughout this document.

**Table 4. Instruction Field Conventions**

The Architecture Specification	Equivalent to:
BA, BB, BT	crbA, crbB, crbD (respectively)
D	d
DS	ds
FXM	CRM
RA, RB, RT, RS	rA, rB, rD, rS (respectively)
SI	SIMM
U	IMM
UI	UIMM
I, II, III	0...0 (shaded)

Precedence rules for pseudocode operators are summarized in Table 5.


**Table 5. Precedence Rules**

Operators	Associativity
$x[n]$ , function evaluation	Left to right
$(n)x$ or replication, $x(n)$ or exponentiation	Right to left
unary $-$ , $\neg$	Right to left
$*$ , $\div$	Left to right
$+$ , $-$	Left to right
$\parallel$	Left to right
$=$ , $\neq$ , $<$ , $\leq$ , $>$ , $\geq$ , $<U$ , $>U$ , $?$	Left to right
$\&$ , $\oplus$ , $\equiv$	Left to right
$ $	Left to right
$-$ (range)	None
$\leftarrow$ , $\leftarrow_{iea}$	None

Operators higher in Table 5 are applied before those lower in the table. Operators at the same level in the table associate from left to right, from right to left, or not at all, as shown. For example, “ $-$ ” (unary minus) associates from left to right, so  $a - b - c = (a - b) - c$ . Parentheses are used to override the evaluation order implied by Table 5, or to increase clarity; parenthesized expressions are evaluated before serving as operands.

# MPCxxx Instruction Set

The remainder of this chapter lists and describes the instruction set for the MPCxxx. The instructions are listed in alphabetical order by mnemonic. Figure 1 shows the format for each instruction description page.

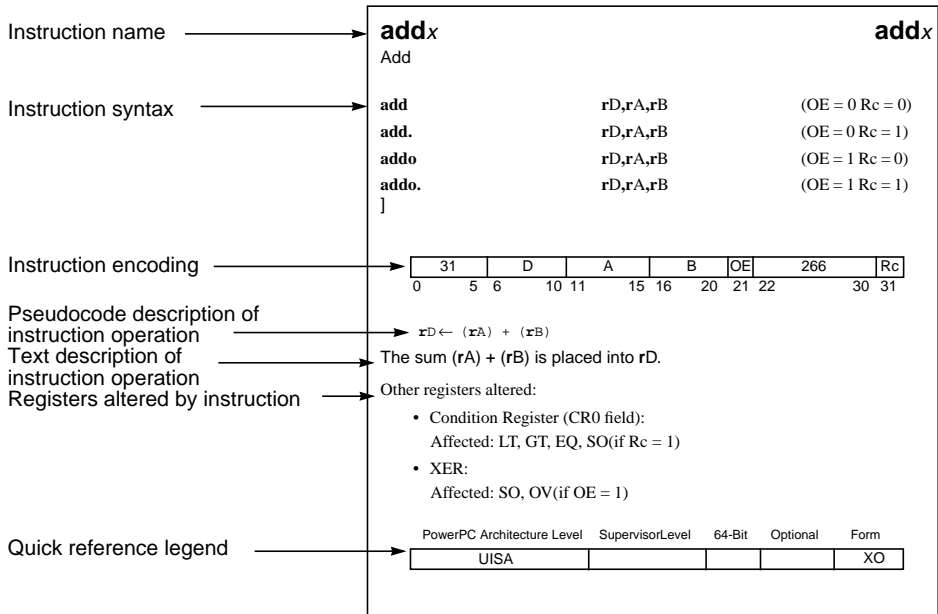

## Instruction Description


Note that the execution unit that executes the instruction may not be the same for all PowerPC processors.

# add<sub>x</sub>

Add

- add**                      rD,rA,rB    (OE = 0 Rc = 0)
- add.**                     rD,rA,rB    (OE = 0 Rc = 1)
- addo**                    rD,rA,rB    (OE = 1 Rc = 0)
- addo.**                   rD,rA,rB    (OE = 1 Rc = 1)

# add<sub>x</sub>



$$rD \leftarrow (rA) + (rB)$$

The sum (rA) + (rB) is placed into rD.

The **add** instruction is preferred for addition because it sets few status bits.

Other registers altered:

- Condition Register (CR0 field):  
   Affected: LT, GT, EQ, SO                      (if Rc = 1)  
   Note: CR0 field may not reflect the “true” (infinitely precise) result if overflow occurs (see XER below).
- XER:  
   Affected: SO, OV                                      (if OE = 1)

PowerPC Architecture Level	Supervisor Level	Optional	Form
UIA			XO




# addc<sub>x</sub>

Add Carrying

# addc<sub>x</sub>

- addc**                    rD,rA,rB    (OE = 0 R<sub>c</sub> = 0)
- addc.**                rD,rA,rB    (OE = 0 R<sub>c</sub> = 1)
- addco**                rD,rA,rB    (OE = 1 R<sub>c</sub> = 0)
- addco.**               rD,rA,rB    (OE = 1 R<sub>c</sub> = 1)



$$rD \leftarrow (rA) + (rB)$$

The sum (rA) + (rB) is placed into rD.

Other registers altered:

- Condition Register (CR0 field):  
 Affected: LT, GT, EQ, SO                    (if R<sub>c</sub> = 1)  
 Note: CR0 field may not reflect the “true” (infinitely precise) result if overflow occurs (see XER below).
- XER:  
 Affected: CA  
 Affected: SO, OV                                (if OE = 1)


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XO

# adde<sub>x</sub>

Add Extended

# adde<sub>x</sub>

<b>adde</b>	<b>rD,rA,rB</b>	(OE = 0 Rc = 0)
<b>adde.</b>	<b>rD,rA,rB</b>	(OE = 0 Rc = 1)
<b>addeo</b>	<b>rD,rA,rB</b>	(OE = 1 Rc = 0)
<b>addeo.</b>	<b>rD,rA,rB</b>	(OE = 1 Rc = 1)



$$rD \leftarrow (rA) + (rB) + XER[CA]$$

The sum (rA) + (rB) + XER[CA] is placed into rD.

Other registers altered:

- Condition Register (CR0 field):  
 Affected: LT, GT, EQ, SO (if Rc = 1)  
 Note: CR0 field may not reflect the “true” (infinitely precise) result if overflow occurs (see XER below).
- XER:  
 Affected: CA  
 Affected: SO, OV (if OE = 1)

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XO




# addi

Add Immediate

# addi

**addi**                      rD,rA,SIMM



```
if rA = 0 then rD ← EXTS(SIMM)
else rD ← rA + EXTS(SIMM)
```

The sum (rA|0) + SIMM is placed into rD.

The **addi** instruction is preferred for addition because it sets few status bits. Note that **addi** uses the value 0, not the contents of GPR0, if rA = 0.

Other registers altered:

- None

Simplified mnemonics:

<b>li</b>	rD,value	equivalent to	<b>addi</b> rD,0,value
<b>la</b>	rD,disp(rA)	equivalent to	<b>addi</b> rD,rA,disp
<b>subi</b>	rD,rA,value	equivalent to	<b>addi</b> rD,rA,-value


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D

# addic

# addic

Add Immediate Carrying

**addic**                      **rD,rA,SIMM**



$$rD \leftarrow (rA) + \text{EXTS}(SIMM)$$

The sum (rA) + SIMM is placed into rD.

Other registers altered:

- XER:  
    Affected: CA

Simplified mnemonics:

**subic** rD,rA,value                      equivalent to                      **addic** rD,rA,-value

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D




# addic.

Add Immediate Carrying and Record

# addic.

**addic.**                    rD,rA,SIMM



$$rD \leftarrow (rA) + \text{EXTS}(SIMM)$$

The sum (rA) + SIMM is placed into rD.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO  
**Note:** CR0 field may not reflect the “true” (infinitely precise) result if overflow occurs (see XER below).
- XER:  
Affected: CA

Simplified mnemonics:

**subic.** rD,rA,value                    equivalent to                    **addic.** rD,rA,-value


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D

# addis

Add Immediate Shifted

# addis

**addis**                      rD,rA,SIMM



```
if rA = 0 then rD ← EXTS(SIMM || (16)0)
else rD ← (rA) + EXTS(SIMM || (16)0)
```

The sum (rA|0) + (SIMM || 0x0000) is placed into rD.

The **addis** instruction is preferred for addition because it sets few status bits. Note that **addis** uses the value 0, not the contents of GPR0, if rA = 0.

Other registers altered:

- None

Simplified mnemonics:

<b>lis</b> rD,value	equivalent to	<b>addis</b> rD,0,value
<b>subis</b> rD,rA,value	equivalent to	<b>addis</b> rD,rA,-value

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D


# addmex

Add to Minus One Extended

# addmex

<b>addme</b>	rD,rA	(OE = 0 Rc = 0)
<b>addme.</b>	rD,rA	(OE = 0 Rc = 1)
<b>addmeo</b>	rD,rA	(OE = 1 Rc = 0)
<b>addmeo.</b>	rD,rA	(OE = 1 Rc = 1)

Reserved



$$rD \leftarrow (rA) + XER[CA] - 1$$

The sum  $(rA) + XER[CA] + 0xFFFF\_FFFF\_FFFF\_FFFF$  is placed into rD.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO (if Rc = 1)  
**Note:** CR0 field may not reflect the “true” (infinitely precise) result if overflow occurs (see XER below).
- XER:  
Affected: CA  
Affected: SO, OV (if OE = 1)

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XO


# addze<sub>x</sub>

Add to Zero Extended

# addze<sub>x</sub>

<b>addze</b>	rD,rA	(OE = 0 R <sub>c</sub> = 0)
<b>addze.</b>	rD,rA	(OE = 0 R <sub>c</sub> = 1)
<b>addzeo</b>	rD,rA	(OE = 1 R <sub>c</sub> = 0)
<b>addzeo.</b>	rD,rA	(OE = 1 R <sub>c</sub> = 1)

Reserved



$$rD \leftarrow (rA) + XER[CA]$$

The sum (rA) + XER[CA] is placed into rD.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO (if R<sub>c</sub> = 1)  
**Note:** CR0 field may not reflect the “true” (infinitely precise) result if overflow occurs (see XER below).
- XER:  
Affected: CA  
Affected: SO, OV (if OE = 1)

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XO






# and<sub>x</sub>

AND

# and<sub>x</sub>

**and**                                    *rA,rS,rB*                                    (*Rc* = 0)

**and.**                                    *rA,rS,rB*                                    (*Rc* = 1)



$$rA \leftarrow (rS) \& (rB)$$

The contents of *rS* are ANDed with the contents of *rB* and the result is placed into *rA*.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO                                    (if *Rc* = 1)

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X


# andc<sub>x</sub>

AND with Complement

# andc<sub>x</sub>

**andc**                                    **rA,rS,rB**                                    (**Rc = 0**)

**andc.**                                    **rA,rS,rB**                                    (**Rc = 1**)



$$rA \leftarrow (rS) + \neg (rB)$$

The contents of **rS** are ANDed with the one's complement of the contents of **rB** and the result is placed into **rA**.

Other registers altered:

- Condition Register (CR0 field):  
     Affected: LT, GT, EQ, SO                                    (if **Rc = 1**)


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X

# andi.

AND Immediate

# andi.

**andi.**                      rA,rS,UIMM



$$rA \leftarrow (rS) \& ((\underline{16})0 \parallel UIMM)$$

The contents of rS are ANDed with 0x0000 || UIMM and the result is placed into rA.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D

# andis.

AND Immediate Shifted

# andis.

**andis.**                      **rA,rS,UIMM**



$$rA \leftarrow (rS) + (UIMM \parallel (16)0)$$

The contents of **rS** are ANDed with **UIMM || 0x0000** and the result is placed into **rA**.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D

# bx

Branch

# bx

<b>b</b>	target_addr	(AA = 0 LK = 0)
<b>ba</b>	target_addr	(AA = 1 LK = 0)
<b>bl</b>	target_addr	(AA = 0 LK = 1)
<b>bla</b>	target_addr	(AA = 1 LK = 1)



```

if AA then NIA ← iea EXTS(LI || 0b00)
else NIA ← iea CIA + EXTS(LI || 0b00)
if LK then LR ← iea CIA + 4
    
```

target\_addr specifies the branch target address.


If AA = 0, then the branch target address is the sum of LI || 0b00 sign-extended and the address of this instruction. If AA = 1, then the branch target address is the value LI || 0b00 sign-extended. If LK = 1, then the effective address of the instruction following the branch instruction is placed into the link register.

Other registers altered:

Affected: Link Register (LR) (if LK = 1)

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			I

<b>bc</b>	BO, BI, target_addr	(AA = 0 LK = 0)
<b>bca</b>	BO, BI, target_addr	(AA = 1 LK = 0)
<b>bcl</b>	BO, BI, target_addr	(AA = 0 LK = 1)
<b>bcla</b>	BO, BI, target_addr	(AA = 1 LK = 1)



```

m ← 32
if ¬ BO[2] then CTR ← CTR - 1
ctr_ok ← BO[2] | (BO[3])
cond_ok ← BO[0] | (CR[BI] ≡ BO[1])
if ctr_ok & cond_ok then
  if AA then NIA ←_iea EXTS(BD || 0b00)
  else NIA ←_iea CIA + EXTS(BD || 0b00)
  if LK then LR ←_iea CIA + 4
  
```

The BI field specifies the bit in the condition register (CR) to be used as the condition of the branch. The BO field is encoded as described in Table 6.

**Table 6. BO Operand Encodings**

BO	Description
0000y	Decrement the count register (CTR), then branch if the condition is FALSE.
0001y	Decrement the CTR, then branch if the condition is FALSE.
001zy	Branch if the condition is FALSE.
0100y	Decrement the CTR, then branch if the condition is TRUE.
0101y	Decrement the CTR, then branch if the condition is TRUE.
011zy	Branch if the condition is TRUE.
1z00y	Decrement the CTR, then branch if the decremented CTR ≠ 0.
1z01y	Decrement the CTR, then branch if the decremented CTR = 0.
1z1zz	Branch always.

In this table, z indicates a bit that is ignored.  
 Note that the z bits should be cleared, as they may be assigned a meaning in some future version of the MPCxxx.

The y bit provides a hint about whether a conditional branch is likely to be taken.

target\_addr specifies the branch target address.



If AA = 0, the branch target address is the sum of BD || 0b00 sign-extended and the address of this instruction. If AA = 1, the branch target address is the value BD || 0b00 sign-extended. If LK = 1, the effective address of the instruction following the branch instruction is placed into the link register.

Other registers altered:

Affected: Count Register (CTR) (if BO[2] = 0)

Affected: Link Register (LR) (if LK = 1)


Simplified mnemonics:

<b>blt</b>	target	equivalent to	<b>bc</b>	<b>12,0,target</b>
<b>bne</b>	<b>cr2,target</b>	equivalent to	<b>bc</b>	<b>4,10,target</b>
<b>bdnz</b>	target	equivalent to	<b>bc</b>	<b>16,0,target</b>

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			B

**bcctr** BO,BI (LK = 0)  
**bcctrl** BO,BI (LK = 1)

Reserved



```
cond_ok ← BO[0] | (CR[BI] ≡ BO[1])
if cond_ok then
  NIA ←iea CTR || 0b00
  if LK then LR ←iea CIA + 4
```

The BI field specifies the bit in the condition register to be used as the condition of the branch. The BO field is encoded as described in Table 7.

**Table 7. BO Operand Encodings**

BO	Description
0000y	Decrement the count register (CTR), then branch if the condition is FALSE.
0001y	Decrement the CTR, then branch if the condition is FALSE.
001zy	Branch if the condition is FALSE.
0100y	Decrement the CTR, then branch if the condition is TRUE.
0101y	Decrement the CTR, then branch if the condition is TRUE.
011zy	Branch if the condition is TRUE.
1z00y	Decrement the CTR, then branch if the decremented CTR ≠ 0.
1z01y	Decrement the CTR, then branch if the decremented CTR = 0.
1z1zz	Branch always.

In this table, z indicates a bit that is ignored.  
 Note that the z bits should be cleared, as they may be assigned a meaning in some future version of the MPCxxx.

The y bit provides a hint about whether a conditional branch is likely to be taken.

The branch target address is CTR || 0b00.

If LK = 1, the effective address of the instruction following the branch instruction is placed into the link register.

If the “decrement and test CTR” option is specified (BO[2] = 0), the instruction form is invalid.





Other registers altered:

Affected: Link Register (LR) (if LK = 1)


Simplified mnemonics:

<b>blctr</b>	equivalent to	<b>bcctr</b>	<b>12,0</b>
<b>bnctr cr2</b>	equivalent to	<b>bcctr</b>	<b>4,10</b>

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XL

**bclr** BO,BI (LK = 0)  
**bclrl** BO,BI (LK = 1)

Reserved



```

m ← 32
if ¬ BO[2] then CTR ← CTR - 1
ctr_ok ← BO[2] | ((CTR ≠ 0) ⊕ BO[3])
cond_ok ← BO[0] | (CR[BI] ≡ BO[1])
if ctr_ok & cond_ok then
  NIA ←iea LR || 0b00
  if LK then LR ←iea CIA + 4
  
```

The BI field specifies the bit in the condition register to be used as the condition of the branch. The BO field is encoded as described in Table 8.

**Table 8. BO Operand Encodings**

BO	Description
0000y	Decrement the CTR, then branch if the condition is FALSE.
0001y	Decrement the CTR, then branch if the condition is FALSE.
001zy	Branch if the condition is FALSE.
0100y	Decrement the CTR, then branch if the condition is TRUE.
0101y	Decrement the CTR, then branch if the condition is TRUE.
011zy	Branch if the condition is TRUE.
1z00y	Decrement the CTR, then branch if the decremented CTR ≠ 0.
1z01y	Decrement the CTR, then branch if the decremented CTR = 0.
1z1zz	Branch always.

In this table, z indicates a bit that is ignored.  
 Note that the z bits should be cleared, as they may be assigned a meaning in some future version of the MPCxxx.

The y bit provides a hint about whether a conditional branch is likely to be taken.

The branch target address is LR[0-29] || 0b00.

If LK = 1, then the effective address of the instruction following the branch instruction is placed into the link register.



Other registers altered:

Affected: Count Register (CTR) (if BO[2] = 0)

Affected: Link Register (LR) (if LK = 1)

Simplified mnemonics:

<b>bltr</b>	equivalent to	<b>bclr</b>	<b>12,0</b>
<b>bnelr cr2</b>	equivalent to	<b>bclr</b>	<b>4,10</b>
<b>bdnzlr</b>	equivalent to	<b>bclr</b>	<b>16,0</b>

PowerPC Architecture Level	Supervisor Level	Optional	Form
UIA			XL


# cmp

Compare

# cmp

**cmp**                      **crfD,L,rA,rB**

Reserved



```

a ← EXTS(rA)
b ← EXTS(rB)
if a < b then c ← 0b100
else if a > b then c ← 0b010
else c ← 0b001
CR[4 * crfD - 4 * crfD + 3] ← c || XER[SO]

```

The contents of **rA** are compared with the contents of **rB** treating the operands as signed integers. The result of the comparison is placed into CR field **crfD**.

Other registers altered:

- Condition Register (CR field specified by operand **crfD**):  
Affected: LT, GT, EQ, SO

Simplified mnemonics:

**cmpd rA,rB**                      equivalent to                      **cmp 0,1,rA,rB**  
**cmpw cr3,rA,rB**                      equivalent to                      **cmp 3,0,rA,rB**

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X


# cmpi

Compare Immediate

# cmpi

**cmpi**                    **crfD,L,rA,SIMM**

Reserved



```

a ← (rA)
ifa < EXTS(SIMM) then c ← 0b100
else if a > EXTS(SIMM) then c ← 0b010
else c ← 0b001
CR[4 * crfD - 4 * crfD + 3] ← c || XER[SO]

```

The contents of **rA** are compared with the sign-extended value of the SIMM field, treating the operands as signed integers. The result of the comparison is placed into CR field **crfD**.

Other registers altered:

- Condition Register (CR field specified by operand **crfD**):  
Affected: LT, GT, EQ, SO

Simplified mnemonics:

**cmpdirA,value**                    equivalent to                    **cmpi 0,1,rA,value**  
**cmpwi cr3,rA,value**                equivalent to                    **cmpi 3,0,rA,value**

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D


# cmpl

Compare Logical

# cmpl

**cmpl**                      **crfD,L,rA,rB**

Reserved



```

a ← rA
b ← rB
if a <U b then c ← 0b100
else if a >U b then c ← 0b010
else c ← 0b001
CR[4 * crfD - 4 * crfD + 3] ← c || XER[SO]

```

The contents of **rA** are compared with the contents of **rB**, treating the operands as unsigned integers. The result of the comparison is placed into CR field **crfD**.

Other registers altered:

- Condition Register (CR field specified by operand **crfD**):  
Affected: LT, GT, EQ, SO

Simplified mnemonics:

**cmpldrA,rB**                      equivalent to                      **cmpl 0,1,rA,rB**  
**cmplw cr3,rA,rB**                equivalent to                      **cmpl 3,0,rA,rB**

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X


# cmpli

Compare Logical Immediate

# cmpli

**cmpli**                    **crfD,L,rA,UIMM**

Reserved



```

a ← (rA)
ifa <U ((16)0 || UIMM) then c ← 0b100
else if a >U ((16)0 || UIMM) then c ← 0b010
else c ← 0b001
CR[4 * crfD - 4 * crfD + 3] ← c || XER[SO]

```

The contents of **rA** are compared with **0x0000|| UIMM**, treating the operands as unsigned integers. The result of the comparison is placed into CR field **crfD**.

Other registers altered:

- Condition Register (CR field specified by operand **crfD**):  
Affected: LT, GT, EQ, SO

Simplified mnemonics:

**cmpldir** **A,value**                    equivalent to                    **cmpli 0,1,rA,value**  
**cmplwi** **cr3,rA,value**                equivalent to                    **cmpli 3,0,rA,value**

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D

# cntlzw<sub>x</sub>


Count Leading Zeros Word

# cntlzw<sub>x</sub>

**cntlzw**                                      **rA,rS**                                      (**Rc = 0**)

**cntlzw.**                                        **rA,rS**                                      (**Rc = 1**)

Reserved



```
n ← 0
do while n < 32
    if rS[n] = 1 then leave
    n ← n + 1
rA ← n
```

A count of the number of consecutive zero bits starting at bit 0 of **rS** is placed into **rA**. This number ranges from 0 to 32, inclusive.

Other registers altered:

- Condition Register (CR0 field):  
 Affected: LT, GT, EQ, SO                                      (if **Rc = 1**)  
**Note:** If **Rc = 1**, then LT is cleared in the CR0 field.

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X






# crand

Condition Register AND

# crand

**crand**            **crbD,crbA,crbB**

Reserved



$$CR[crbD] \leftarrow CR[crbA] \& CR[crbB]$$

The bit in the condition register specified by **crbA** is ANDed with the bit in the condition register specified by **crbB**. The result is placed into the condition register bit specified by **crbD**.

Other registers altered:

- Condition Register:  
Affected: Bit specified by operand **crbD**

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XL


# crandc

Condition Register AND with Complement

crandc                    **crbD,crbA,crbB**

# crandc

Reserved



$$CR[crbD] \leftarrow CR[crbA] \& \neg CR[crbB]$$

The bit in the condition register specified by **crbA** is ANDed with the complement of the bit in the condition register specified by **crbB** and the result is placed into the condition register bit specified by **crbD**.

Other registers altered:

- Condition Register:  
Affected: Bit specified by operand **crbD**

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XL


# creqv

Condition Register Equivalent

# creqv

**creqv**                      **crbD,crbA,crbB**

Reserved



$$CR[crbD] \leftarrow CR[crbA] \oplus CR[crbB]$$

The bit in the condition register specified by **crbA** is XORed with the bit in the condition register specified by **crbB** and the complemented result is placed into the condition register bit specified by **crbD**.

Other registers altered:

- Condition Register:  
Affected: Bit specified by operand crbD

Simplified mnemonics:

**crset crbD**                      equivalent to                      **creqv crbD,crbD,crbD**

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XL


# crnand

Condition Register NAND

# crnand

**crnand**            **crbD,crbA,crbB**

Reserved



$$CR[crbD] \leftarrow \neg (CR[crbA] \& CR[crbB])$$

The bit in the condition register specified by **crbA** is ANDed with the bit in the condition register specified by **crbB** and the complemented result is placed into the condition register bit specified by **crbD**.

Other registers altered:

- Condition Register:  
Affected: Bit specified by operand **crbD**

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XL


# crnor

Condition Register NOR

# crnor

**crnor**                    **crbD,crbA,crbB**

Reserved



$$CR[crbD] \leftarrow \neg (CR[crbA] \mid CR[crbB])$$

The bit in the condition register specified by **crbA** is ORed with the bit in the condition register specified by **crbB** and the complemented result is placed into the condition register bit specified by **crbD**.

Other registers altered:

- Condition Register:  
Affected: Bit specified by operand **crbD**

Simplified mnemonics:

**crnot crbD,crbA**                    equivalent to                    **crnor crbD,crbA,crbA**

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XL


# cror

Condition Register OR

# cror

**cror**                      **crbD,crbA,crbB**

Reserved



$$CR[crbD] \leftarrow CR[crbA] \mid CR[crbB]$$

The bit in the condition register specified by **crbA** is ORed with the bit in the condition register specified by **crbB**. The result is placed into the condition register bit specified by **crbD**.

Other registers altered:

- Condition Register:  
Affected: Bit specified by operand crbD

Simplified mnemonics:

**crmove crbD,crbA**                      equivalent to                      **cror crbD,crbA,crbA**

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XL


# crorc

Condition Register OR with Complement

# CRORC

**crorc**                      **crbD,crbA,crbB**

Reserved



$$CR[crbD] \leftarrow CR[crbA] \mid \neg CR[crbB]$$

The bit in the condition register specified by **crbA** is ORed with the complement of the condition register bit specified by **crbB** and the result is placed into the condition register bit specified by **crbD**.

Other registers altered:

- Condition Register:  
Affected: Bit specified by operand **crbD**

PowerPC Architecture Level	Supervisor Level	Optional	Form
UIA			XL


# crxor

Condition Register XOR

# crxor

**crxor**                      **crbD,crbA,crbB**

Reserved



$$CR[crbD] \leftarrow CR[crbA] \oplus CR[crbB]$$

The bit in the condition register specified by **crbA** is XORed with the bit in the condition register specified by **crbB** and the result is placed into the condition register specified by **crbD**.

Other registers altered:

- Condition Register:  
Affected: Bit specified by **crbD**

Simplified mnemonics:

**crclr crbD**                      equivalent to                      **crxor crbD,crbD,crbD**

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XL



# dcbf


Data Cache Block Flush

# dcbf

**dcbf**

**rA,rB**

Reserved



EA is the sum  $(rA|0) + (rB)$ .

The **dcbf** instruction invalidates the *block* in the data *cache* addressed by EA, copying the block to memory first, if there is any dirty data in it. If the processor is a multiprocessor implementation and the block is marked coherency-required, the processor will, if necessary, send an address-only broadcast to other processors. The broadcast of the **dcbf** instruction causes another processor to copy the block to memory, if it has dirty data, and then invalidate the block from the cache.

The action taken depends on the memory mode associated with the block containing the byte addressed by EA and on the state of that block. The list below describes the action taken for the various states of the *memory coherency* attribute (M bit).

- Coherency required
  - Unmodified block—Invalidates copies of the block in the data caches of all processors.
  - Modified block—Copies the block to memory. Invalidates copies of the block in the data caches of all processors.
  - Absent block—If modified copies of the block are in the data caches of other processors, causes them to be copied to memory and invalidated in those data caches. If unmodified copies are in the data caches of other processors, causes those copies to be invalidated in those data caches.
- Coherency not required
  - Unmodified block—Invalidates the block in the processor's data cache.
  - Modified block—Copies the block to memory. Invalidates the block in the processor's data cache.
  - Absent block (target block not in cache)—No action is taken.

The function of this instruction is independent of the write-through, *write-back* and *caching-inhibited/allowed* modes of the block containing the byte addressed by EA.



This instruction may be treated as a load from the addressed byte with respect to address translation and memory protection. It may also be treated as a load for referenced and changed bit recording except that referenced and changed bit recording may not occur.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
VEA			X


# dcbi

Data Cache Block Invalidate

# dcbi

**dcbi**                                    **rA,rB**

Reserved



EA is the sum  $(rA|0) + (rB)$ .

The action taken is dependent on the memory mode associated with the block containing the byte addressed by EA and on the state of that block. The list below describes the action taken if the block containing the byte addressed by EA is or is not in the cache.

- Coherency required
  - Unmodified block—Invalidates copies of the block in the data caches of all processors.
  - Modified block—Invalidates copies of the block in the data caches of all processors. (Discards the modified contents.)
  - Absent block—If copies of the block are in the data caches of any other processor, causes the copies to be invalidated in those data caches. (Discards any modified contents.)
- Coherency not required
  - Unmodified block—Invalidates the block in the processor's data cache.
  - Modified block—Invalidates the block in the processor's data cache. (Discards the modified contents.)
  - Absent block (target block not in cache)—No action is taken.

When data address translation is enabled, MSR[DR] = 1, and the *virtual address* has no translation, a DSI *exception* occurs. The function of this instruction is independent of the *write-through* and caching-inhibited/allowed modes of the block containing the byte addressed by EA. This instruction operates as a store to the addressed byte with respect to address translation and protection. The *referenced* and *changed bits* are modified appropriately. This is a supervisor-level instruction.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
OEA	√		X


# dcbst

Data Cache Block Store

# dcbst

**dcbst** **rA,rB**

Reserved



EA is the sum  $(rA|0) + (rB)$ .

The **dcbst** instruction executes as follows:

- If the block containing the byte addressed by EA is in coherency-required mode, and a block containing the byte addressed by EA is in the data cache of any processor and has been modified, the writing of it to main memory is initiated.
- If the block containing the byte addressed by EA is in coherency-not-required mode, and a block containing the byte addressed by EA is in the data cache of this processor and has been modified, the writing of it to main memory is initiated.

The function of this instruction is independent of the write-through and caching-inhibited/allowed modes of the block containing the byte addressed by EA. The processor treats this instruction as a load from the addressed byte with respect to address translation and memory protection. It may also be treated as a load for referenced and changed bit recording except that referenced and changed bit recording may not occur.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
VEA			X


# dcbt

Data Cache Block Touch

# dcbt

**dcbt** **rA,rB**

Reserved



EA is the sum  $(rA|0) + (rB)$ .

This instruction is a hint that performance will probably be improved if the block containing the byte addressed by EA is *fetched* into the data cache, because the program will probably soon load from the addressed byte. The hint is ignored if the block is caching-inhibited. Executing **dcbt** does not cause the system alignment error handler to be invoked.

This instruction may be treated as a load from the addressed byte with respect to address translation, memory protection, and reference and change recording, except that no exception occurs in the case of a translation fault or protection violation.

The program uses the **dcbt** instruction to request a *cache block* fetch before it is actually needed by the program. The program can later execute load instructions to put data into registers. However, the processor is not obliged to load the addressed block into the data cache.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
VEA			X




# dcbtst

Data Cache Block Touch for Store

# dcbtst

**dcbtst**  $rA, rB$

Reserved



EA is the sum  $(rA|0) + (rB)$ .

This instruction is a hint that performance will be improved if the block containing the byte addressed by EA is fetched into the data cache, because the program will probably soon store into the addressed byte. The hint is ignored if the block is caching-inhibited. Executing **dcbtst** does not cause the system alignment error handler to be invoked.

This instruction operates as a load from the addressed byte with respect to address translation and protection, except that no exception occurs in the case of a translation fault or protection violation. Also, if the referenced and changed bits are recorded, they are recorded as if the access was a load.

The program uses **dcbtst** to request a cache block fetch to guarantee that a subsequent store will be to a cached location. The program can later execute store instructions to put data into memory. However, the processor is not obliged to load the addressed cache block into the data cache.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
VEA			X


# dcbz

Data Cache Block Set to Zero

# dcbz

**dcbz** **rA,rB**

Reserved



EA is the sum (rA|0) + (rB).

The **dcbz** instruction executes as follows:

- If the cache block containing the byte addressed by EA is in the data cache, all bytes are cleared.
- If the cache block containing the byte addressed by EA is not in the data cache and the corresponding *page* is caching-allowed, the cache block is allocated in the data cache (without fetching the block from main memory), and all bytes are cleared.
- If the page containing the byte addressed by EA is in caching-inhibited or write-through mode, either all bytes of main memory that correspond to the addressed cache block are cleared or the alignment *exception handler* is invoked. The exception handler clears all bytes in main memory that corresponds to the addressed cache block.
- If the cache block containing the byte addressed by EA is in coherency-required mode, and the cache block exists in the data cache(s) of any other processor(s), it is kept coherent in those caches.

This instruction is treated as a store to the addressed byte with respect to address translation, memory protection, referenced and changed recording and the ordering enforced by **eieio** or by the combination of caching-inhibited and guarded attributes for a page.

Other registers altered:

- None


PowerPC Architecture Level	Supervisor Level	Optional	Form
VEA			X

# divw<sub>x</sub>

Divide Word

# divw<sub>x</sub>

<b>divw</b>	rD,rA,rB	(OE = 0 Rc = 0)
<b>divw.</b>	rD,rA,rB	(OE = 0 Rc = 1)
<b>divwo</b>	rD,rA,rB	(OE = 1 Rc = 0)
<b>divwo.</b>	rD,rA,rB	(OE = 1 Rc = 1)



```

dividend ← (rA)
divisor ← (rB)
rD ← dividend ÷ divisor

```

The dividend is the contents of rA. The divisor is the contents of rB. The 32-bit quotient is formed and placed in rD. The remainder is not supplied as a result.

Both the operands and the quotient are interpreted as signed integers. The quotient is the unique signed integer that satisfies the equation—dividend = (quotient \* divisor) + r where  $0 \leq r < |\text{divisor}|$  (if the dividend is non-negative), and  $-|\text{divisor}| < r \leq 0$  (if the dividend is negative).

If an attempt is made to perform any of the divisions— $0x8000\_0000 \div -1$  or  $\langle \text{anything} \rangle \div 0$ —then the contents of rD are undefined, as are the contents of the LT, GT, and EQ bits of the CR0 field (if Rc = 1). In this case, if OE = 1 then OV is set.

The 32-bit signed remainder of dividing the contents of rA by the contents of rB can be computed as follows, except in the case that the contents of rA = -231 and the contents of rB = -1.

<b>divw</b>	rD,rA,rB	# rD = quotient
<b>mullw</b>	rD,rD,rB	# rD = quotient * divisor
<b>subf</b>	rD,rD,rA	# rD = remainder





Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO (if Rc = 1)
- XER:  
Affected: SO, OV (if OE = 1)

**Note:** The setting of the affected bits in the XER is mode-independent, and reflects overflow of the 32-bit result.


PowerPC Architecture Level	Supervisor Level	Optional	Form
UI5A			XO

# divwu<sub>x</sub>

Divide Word Unsigned

# divwu<sub>x</sub>

<b>divwu</b>	<b>rD,rA,rB</b>	(OE = 0 Rc = 0)
<b>divwu.</b>	<b>rD,rA,rB</b>	(OE = 0 Rc = 1)
<b>divwuo</b>	<b>rD,rA,rB</b>	(OE = 1 Rc = 0)
<b>divwuo.</b>	<b>rD,rA,rB</b>	(OE = 1 Rc = 1)



```

dividend ← (rA)
divisor ← (rB)
rD ← dividend ÷ divisor
    
```

The dividend is the contents of rA. The divisor is the contents of rB. A 32-bit quotient is formed. The 32-bit quotient is placed into rD. The remainder is not supplied as a result.

Both operands and the quotient are interpreted as unsigned integers, except that if Rc = 1 the first three bits of CR0 field are set by signed comparison of the result to zero. The quotient is the unique unsigned integer that satisfies the equation—dividend = (quotient \* divisor) + r (where 0 ≤ r < divisor). If an attempt is made to perform the division—<anything> ÷ 0—then the contents of rD are undefined as are the contents of the LT, GT, and EQ bits of the CR0 field (if Rc = 1). In this case, if OE = 1 then OV is set.

The 32-bit unsigned remainder of dividing the contents of rA by the contents of rB can be computed as follows:

<b>divwu</b>	<b>rD,rA,rB</b>	<b># rD = quotient</b>
<b>mullw</b>	<b>rD,rD,rB</b>	<b># rD = quotient * divisor</b>
<b>subf</b>	<b>rD,rD,rA</b>	<b># rD = remainder</b>



Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO (if Rc = 1)
- XER:  
Affected: SO, OV (if OE = 1)

**Note:** The setting of the affected bits in the XER is mode-independent, and reflects overflow of the 32-bit result.

PowerPC Architecture Level	Supervisor Level	Optional	Form
UI5A			XO


# eciwx

External Control In Word Indexed

# eciwx

**eciwx**                                rD,rA,rB

  Reserved



The **eciwx** instruction allows the system designer to map special devices in an alternative way. The MMU translation of the EA is not used to select the special device, as it is used in most instructions such as loads and stores. Rather, it is used as an address operand that is passed to the device over the address bus. Four other pins (the burst and size pins on the 60x bus) are used to select the device; these four pins output the 4-bit resource ID (RID) field that is located in the EAR register. The **eciwx** instruction also loads a word from the data bus that is output by the special device.

The **eciwx** instruction and the EAR register can be very efficient when mapping special devices such as graphics devices that use addresses as pointers.

```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
paddr ← address translation of EA
send load word request for paddr to device identified by EAR[RID]
rD ← word from device

```

EA is the sum (rA|0) + (rB).

A load word request for the physical address (referred to as real address in the architecture specification) corresponding to EA is sent to the device identified by EAR[RID], bypassing the cache. The word returned by the device is placed in rD. EAR[E] must be 1. If it is not, a DSI exception is generated.

EA must be a multiple of four. If it is not, one of the following occurs:

- A system alignment exception is generated.
- A DSI exception is generated (possible only if EAR[E] = 0).
- The results are *boundedly undefined*.

The **eciwx** instruction is supported for EAs that reference memory *segments* in which  $SR[T] = 1$  and for EAs mapped by the DBAT registers. If the EA references a *direct-store* segment ( $SR[T] = 1$ ), either a DSI exception occurs or the results are boundedly undefined. However, note that the direct-store facility is being phased out of the architecture and will not likely be supported in future devices. Thus, software should not depend on its effects.



If this instruction is executed when MSR[DR] = 0 (real addressing mode), the results are boundedly undefined. This instruction is treated as a load from the addressed byte with respect to address translation, memory protection, referenced and changed bit recording, and the ordering performed by **eiio**. This instruction is optional in the PowerPC architecture.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
VEA		√	X


# ecowx

External Control Out Word Indexed

# ecowx

**ecowx**                      rS,rA,rB

Reserved



The **ecowx** instruction and the EAR register can be very efficient when mapping special devices such as graphics devices that use addresses as pointers.

```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
paddr ← address translation of EA
send store word request for paddr to device identified by EAR[RID]
send rS to device
    
```

EA is the sum (rA|0) + (rB). A store word request for the physical address corresponding to EA and the contents of rS are sent to the device identified by EAR[RID], bypassing the cache. EAR[E] must be 1, if it is not, a DSI exception is generated. EA must be a multiple of four. If it is not, one of the following occurs:

- A system alignment exception is generated.
- A DSI exception is generated (possible only if EAR[E] = 0).
- The results are boundedly undefined.


The **ecowx** instruction is supported for effective addresses that reference memory segments in which SR[T] = 0, and for EAs mapped by the DBAT registers. If the EA references a direct-store segment (SR[T] = 1), either a DSI exception occurs or the results are boundedly undefined. However, note that the direct-store facility is being phased out of the architecture and will not likely be supported in future devices. Thus, software should not depend on its effects.

If this instruction is executed when MSR[DR] = 0 (real addressing mode), the results are boundedly undefined. This instruction is treated as a store from the addressed byte with respect to address translation, memory protection, nd referenced and changed bit recording, and the ordering performed by **eiio**. This instruction is optional in the PowerPC architecture.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
VEA		√	X



The **eieio** instruction provides an ordering function for the effects of load and store instructions executed by a processor. These loads and stores are divided into two sets, which are ordered separately. The *memory accesses* caused by a **dcbz** instruction are ordered like a store. The two sets follow:

1. Loads and stores to memory that is both caching-inhibited and guarded, and stores to memory that is write-through required.

The **eieio** instruction controls the order in which the accesses are performed in main memory. It ensures that all applicable memory accesses caused by instructions preceding the **eieio** instruction have completed with respect to main memory before any applicable memory accesses caused by instructions following the **eieio** instruction access main memory. It acts like a barrier that flows through the memory queues and to main memory, preventing the reordering of memory accesses across the barrier. No ordering is performed for **dcbz** if the instruction causes the system alignment error handler to be invoked.

All accesses in this set are ordered as a single set—that is, there is not one order for loads and stores to caching-inhibited and guarded memory and another order for stores to write-through required memory.

2. Stores to memory that have all of the following attributes—caching-allowed, write-through not required, and memory-coherency required.

The **eieio** instruction controls the order in which the accesses are performed with respect to coherent memory. It ensures that all applicable stores caused by instructions preceding the **eieio** instruction have completed with respect to coherent memory before any applicable stores caused by instructions following the **eieio** instruction complete with respect to coherent memory.

With the exception of **dcbz**, **eieio** does not affect the order of cache operations (whether caused explicitly by execution of a cache management instruction, or implicitly by the *cache coherency* mechanism). The **eieio** instruction does not affect the order of accesses in one set with respect to accesses in the other set.

The **eieio** instruction may complete before memory accesses caused by instructions preceding the **eieio** instruction have been performed with respect to main memory or coherent memory as appropriate.

The **eieio** instruction is intended for use in managing shared data structures, in accessing memory-mapped I/O, and in preventing load/store combining operations in main memory. For the first use, the shared data structure and the lock that protects it must be altered only by stores that are in the same set (1 or 2; see previous discussion). For the second use, **eieio** can be thought of as placing a barrier into the stream of memory accesses



issued by a processor, such that any given memory access appears to be on the same side of the barrier to both the processor and the I/O device.

Because the processor performs store operations in order to memory that is designated as both caching-inhibited and guarded, the **eieio** instruction is needed for such memory only when loads must be ordered with respect to stores or with respect to other loads.

Note that the **eieio** instruction does not connect hardware considerations to it such as multiprocessor implementations that send an **eieio** address-only broadcast (useful in some designs). For example, if a design has an external buffer that re-orders loads and stores for better bus efficiency, the **eieio** broadcast signals to that buffer that previous loads/stores (marked caching-inhibited, guarded, or write-through required) must complete before any following loads/stores (marked caching-inhibited, guarded, or write-through required).

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
VEA			X




# eqv<sub>x</sub>

Equivalent

# eqv<sub>x</sub>

**eqv**                      rA,rS,rB                      (Rc = 0)  
**eqv.**                      rA,rS,rB                      (Rc = 1)



$$rA \leftarrow (rS) \oplus (rB)$$

The contents of rS are XORed with the contents of rB and the complemented result is placed into rA.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO                      (if Rc = 1)

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X


# extsb<sub>x</sub>

Extend Sign Byte

# extsb<sub>x</sub>

**extsb**                                            rA,rS                                            (Rc = 0)  
**extsb.**                                            rA,rS                                            (Rc = 1)

Reserved



```
S ← rS[24]
rA[24-31] ← rS[24-31]
rA[0-23] ← (24)S
```

The contents of rS[24-31] are placed into rA[24-31]. Bit 24 of rS is placed into rA[0-23].

Other registers altered:

- Condition Register (CR0 field):  
 Affected: LT, GT, EQ, SO                                            (if Rc = 1)

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X


# extsh<sub>x</sub>

Extend Sign Half Word

# extsh<sub>x</sub>

**extsh**                                      rA,rS                                      (Rc = 0)  
**extsh.**                                      rA,rS                                      (Rc = 1)

Reserved



```
S ← rS[16]
rA[16-31] ← rS[16-31]
rA[0-15] ← (16)S
```

The contents of rS[16-31] are placed into rA[16-31]. Bit 16 of rS is placed into rA[0-15].

Other registers altered:

- Condition Register (CR0 field):  
 Affected: LT, GT, EQ, SO                                      (if Rc = 1)

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X


# icbi

Instruction Cache Block Invalidate

# icbi

**icbi** **rA,rB**

Reserved



EA is the sum  $(rA|0) + (rB)$ .

If the block containing the byte addressed by EA is in coherency-required mode, and a block containing the byte addressed by EA is in the instruction cache of any processor, the block is made invalid in all such instruction caches, so that subsequent references cause the block to be refetched.

If the block containing the byte addressed by EA is in coherency-not-required mode, and a block containing the byte addressed by EA is in the instruction cache of this processor, the block is made invalid in that instruction cache, so that subsequent references cause the block to be refetched. The function of this instruction is independent of the write-through, write-back, and caching-inhibited/allowed modes of the block containing the byte addressed by EA.

This instruction is treated as a load from the addressed byte with respect to address translation and memory protection. It may also be treated as a load for referenced and changed bit recording except that referenced and changed bit recording may not occur. Implementations with a combined data and instruction cache treat the **icbi** instruction as a no-op, except that they may invalidate the target block in the instruction caches of other processors if the block is in coherency-required mode.

The **icbi** instruction invalidates the block at EA  $(rA|0 + rB)$ . If the processor is a multiprocessor implementation and the block is marked coherency-required, the processor will send an address-only broadcast to other processors causing those processors to invalidate the block from their instruction caches.

For faster processing, many implementations will not compare the entire EA  $(rA|0 + rB)$  with the tag in the instruction cache. Instead, they will use the bits in the EA to locate the set that the block is in, and invalidate all blocks in that set.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
VEA			X


# isync

Instruction Synchronize

# isync

## isync

Reserved



The **isync** instruction provides an ordering function for the effects of all instructions executed by a processor. Executing an **isync** instruction ensures that all instructions preceding the the **isync** instruction have completed before the **isync** instruction completes, except that memory accesses caused by those instructions need not have been performed with respect to other processors and mechanisms. It also ensures that no subsequent instructions are initiated by the processor until after the **isync** instruction completes. Finally, it causes the processor to discard any prefetched instructions, with the effect that subsequent instructions will be fetched and executed in the context established by the instructions preceding the isync instruction. The **isync** instruction has no effect on the other processors or on their caches. This instruction is context synchronizing.

*Context synchronization* is necessary after certain code sequences that perform complex operations within the processor. These code sequences are usually operating system tasks that involve memory management. For example, if an instruction “A” changes the memory translation rules in the *memory management unit (MMU)*, the **isync** instruction should be executed so that the instructions following instruction “A” will be discarded from the pipeline and refetched according to the new translation rules. This instruction is context synchronizing.

Other registers altered:

- None


PowerPC Architecture Level	Supervisor Level	Optional	Form
VEA			XL

# lbz

Load Byte and Zero

# lbz

**lbz** **rD,d(rA)**



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + EXTS(d)
rD ← (24)0 || MEM(EA, 1)
    
```

EA is the sum (rA|0) + d. The byte in memory addressed by EA is loaded into the low-order eight bits of rD. The remaining bits in rD are cleared.

Other registers altered:

- None


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D

# lbzu

Load Byte and Zero with Update

# lbzu

**lbzu** **rD,d(rA)**



```
EA ← (rA) + EXTS(d)
rD ← (24)0 || MEM(EA, 1)
rA ← EA
```

EA is the sum (rA) + d. The byte in memory addressed by EA is loaded into the low-order eight bits of rD. The remaining bits in rD are cleared. EA is placed into rA. If rA = 0, or rA = rD, the instruction form is invalid.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D


# lbzux

Load Byte and Zero with Update Indexed

# lbzux

**lbzux** **rD,rA,rB**

  Reserved



```
EA ← (rA) + (rB)
rD ← (24)0 || MEM(EA, 1)
rA ← EA
```

EA is the sum (rA) + (rB). The byte in memory addressed by EA is loaded into the low-order eight bits of rD. The remaining bits in rD are cleared. EA is placed into rA. If rA = 0 or rA = rD, the instruction form is invalid.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X




# lbzx

Load Byte and Zero Indexed

# lbzx

**lbzx** **rD,rA,rB**

Reserved



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
rD ← (24)0 || MEM(EA, 1)

```

EA is the sum (rA|0) + (rB). The byte in memory addressed by EA is loaded into the low-order eight bits of rD. The remaining bits in rD are cleared.

Other registers altered:

- None


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X

# lha

Load Half Word Algebraic

# lha

**lha** **rD,d(rA)**



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + EXTS(d)
rD ← EXTS(MEM(EA, 2))
    
```

EA is the sum (rA|0) + d. The half word in memory addressed by EA is loaded into the low-order 16 bits of rD. The remaining bits in rD are filled with a copy of the most-significant bit of the loaded half word.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D




# lhau

Load Half Word Algebraic with Update

# lhau

**lhau** **rD,d(rA)**



```
EA ← (rA) + EXTS(d)
rD ← EXTS(MEM(EA, 2))
rA ← EA
```

EA is the sum (rA) + d. The half word in memory addressed by EA is loaded into the low-order 16 bits of rD. The remaining bits in rD are filled with a copy of the most-significant bit of the loaded half word. EA is placed into rA. If rA = 0 or rA = rD, the instruction form is invalid.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UIA			D


# lhaux

Load Half Word Algebraic with Update Indexed

# lhaux

**lhaux** **rD,rA,rB**

Reserved



```
EA ← (rA) + (rB)
rD ← EXTS(MEM(EA, 2))
rA ← EA
```

EA is the sum (rA) + (rB). The half word in memory addressed by EA is loaded into the low-order 16 bits of rD. The remaining bits in rD are filled with a copy of the most-significant bit of the loaded half word. EA is placed into rA. If rA = 0 or rA = rD, the instruction form is invalid.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X


# lhax

Load Half Word Algebraic Indexed

# lhax

**lhax**                                          **rD,rA,rB**

Reserved



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
rD ← EXTS(MEM(EA, 2))

```

EA is the sum (rA|0) + (rB). The half word in memory addressed by EA is loaded into the low-order 16 bits of rD. The remaining bits in rD are filled with a copy of the most-significant bit of the loaded half word.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X


# lhbrx

Load Half Word Byte-Reverse Indexed

# lhbrx

**lhbrx**                      **rD,rA,rB**

Reserved



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
rD ← (16)0 || MEM(EA + 1, 1) || MEM(EA, 1)
    
```

EA is the sum  $(rA|0) + (rB)$ . Bits 0–7 of the half word in memory addressed by EA are loaded into the low-order eight bits of rD. Bits 8–15 of the half word in memory addressed by EA are loaded into the subsequent low-order eight bits of rD. The remaining bits in rD are cleared.

The PowerPC architecture cautions programmers that some implementations of the architecture may run the **lhbrx** instructions with greater latency than other types of load instructions.

Other registers altered:

- None


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X

# lhz

Load Half Word and Zero

# lhz

**lhz** **rD,d(rA)**



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + EXTS(d)
rD ← (16)0 || MEM(EA, 2)
    
```

EA is the sum  $(rA|0) + d$ . The half word in memory addressed by EA is loaded into the low-order 16 bits of rD. The remaining bits in rD are cleared.

Other registers altered:

- None


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D

# lhzu

Load Half Word and Zero with Update

# lhzu

**lhzu**  $rD, d(rA)$



```
EA ← rA + EXTS(d)
rD ← (16)0 || MEM(EA, 2)
rA ← EA
```

EA is the sum (rA) + d. The half word in memory addressed by EA is loaded into the low-order 16 bits of rD. The remaining bits in rD are cleared. EA is placed into rA. If rA = 0 or rA = rD, the instruction form is invalid.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D






# lhzux

Load Half Word and Zero with Update Indexed

# lhzux

lhzux                              rD,rA,rB

Reserved



$EA \leftarrow (rA) + (rB)$   
 $rD \leftarrow (\underline{16})0 \ || \ MEM(EA, 2)$   
 $rA \leftarrow EA$

EA is the sum ( $rA$ ) + ( $rB$ ). The half word in memory addressed by EA is loaded into the low-order 16 bits of  $rD$ . The remaining bits in  $rD$  are cleared. EA is placed into  $rA$ . If  $rA = 0$  or  $rA = rD$ , the instruction form is invalid.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UI5A			X


# lhzx

Load Half Word and Zero Indexed

# lhzx

lhzx                      rD,rA,rB

Reserved



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
rD ← (16)0 || MEM(EA, 2)

```

EA is the sum (rA|0) + (rB). The half word in memory addressed by EA is loaded into the low-order 16 bits of rD. The remaining bits in rD are cleared.

Other registers altered:

- None


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X

# Imw

Load Multiple Word

# Imw

**Imw**  $rD, d(rA)$



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + EXTS(d)
r ← rD
do while r ≤ 31
    GPR(r) ← MEM(EA, 4)
    r ← r + 1
    EA ← EA + 4
    
```

EA is the sum  $(rA|0) + d$ .  $n = (32 - rD)$ .  $n$  consecutive words starting at EA are loaded into GPRs rD through r31.

EA must be a multiple of four. If it is not, either the system alignment exception handler is invoked or the results are boundedly undefined. If rA is in the range of registers specified to be loaded, including the case in which rA = 0, the instruction form is invalid.

Note that, in some implementations, this instruction is likely to have a greater latency and take longer to execute, perhaps much longer, than a sequence of individual load or store instructions that produce the same results.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D


# lswi

Load String Word Immediate

# lswi

**lswi**                      **rD,rA,NB**

Reserved



```

if rA = 0 then EA ← 0
else EA ← (rA)
if NB = 0 then n ← 32
elsen ← NB
r ← rD - 1
i ← 32
do while n > 0
    if i = 32 then
        r ← r + 1 (mod 32)
        GPR(r) ← 0
        GPR(r)[i-i + 7] ← MEM(EA, 1)
        i ← i + 8
    if i = 32 then i ← 0
    EA ← EA + 1
    n ← n - 1

```

EA is (rA|0). Let  $n = NB$  if  $NB \neq 0$ ,  $n = 32$  if  $NB = 0$ ;  $n$  is the number of bytes to load. Let  $nr = \text{CEIL}(n \div 4)$ ;  $nr$  is the number of registers to be loaded with data.

$n$  consecutive bytes starting at EA are loaded into GPRs rD through rD + nr - 1. Bytes are loaded left to right in each register. The sequence of registers wraps around to r0 if required. If the 4 bytes of register rD + nr - 1 are only partially filled, the unfilled low-order byte(s) of that register are cleared.

If rA is in the range of registers specified to be loaded, including the case in which rA = 0, the instruction form is invalid. Under certain conditions (for example, segment boundary crossing) the data alignment exception handler may be invoked.



Note that, in some implementations, this instruction is likely to have greater latency and take longer to execute, perhaps much longer, than a sequence of individual load or store instructions that produce the same results.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UIA			X


# lswx

Load String Word Indexed

# lswx

**lswx**                      **rD,rA,rB**

Reserved



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
n ← XER[25-31]
r ← rD - 1
i ← 32
rD ← undefined
do while n > 0
  if i = 32 then
    r ← r + 1 (mod 32)
    GPR(r) ← 0
    GPR(r)[i-i + 7] ← MEM(EA, 1)
    i ← i + 8
  if i = 32 then i ← 0
  EA ← EA + 1
n ← n - 1
  
```

EA is the sum (rA|0) + (rB). Let  $n = \text{XER}[25-31]$ ;  $n$  is the number of bytes to load. Let  $nr = \text{CEIL}(n \div 4)$ ;  $nr$  is the number of registers to receive data. If  $n > 0$ ,  $n$  consecutive bytes starting at EA are loaded into GPRs rD through rD + nr - 1.

Bytes are loaded left to right in each register. The sequence of registers wraps around through r0 if required. If the four bytes of rD + nr - 1 are only partially filled, the unfilled low-order byte(s) of that register are cleared. If  $n = 0$ , the contents of rD are undefined.

If rA or rB is in the range of registers specified to be loaded, including the case in which rA = 0, either the system illegal instruction error handler is invoked or the results are boundedly undefined. If rD = rA or rD = rB, the instruction form is invalid. If rD and rA both specify GPR0, the form is invalid.



Under certain conditions (for example, segment boundary crossing) the data alignment exception handler may be invoked. Note that, in some implementations, this instruction is likely to have a greater latency and take longer to execute, perhaps much longer, than a sequence of individual load or store instructions that produce the same results.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UIA			X


# lwarx

Load Word and Reserve Indexed

# lwarx

**lwarx** **rD,rA,rB**

Reserved



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
RESERVE ← 1
RESERVE_ADDR ← physical_addr(EA)
rD ← MEM(EA, 4)

```

EA is the sum (rA|0) + (rB). The word in memory addressed by EA is loaded into rD.

This instruction creates a reservation for use by a store word conditional indexed (**stwcx.**)instruction. The physical address computed from EA is associated with the reservation, and replaces any address previously associated with the reservation. EA must be a multiple of four. If it is not, either the system alignment exception handler is invoked or the results are boundedly undefined.

When the RESERVE bit is set, the processor enables hardware snooping for the block of memory addressed by the RESERVE address. If the processor detects that another processor writes to the block of memory it has reserved, it clears the RESERVE bit. The **stwcx.** instruction will only do a store if the RESERVE bit is set. The **stwcx.** instruction sets the CR0[EQ] bit if the store was successful and clears it if it failed. The **lwarx** and **stwcx.** combination can be used for atomic read-modify-write sequences. Note that the atomic sequence is not guaranteed, but its failure can be detected if CR0[EQ] = 0 after the **stwcx.** instruction.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X




# lwbrx

Load Word Byte-Reverse Indexed

# lwbrx

**lwbrx**  $rD, rA, rB$

Reserved



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
rD ← MEM(EA + 3, 1) || MEM(EA + 2, 1) || MEM(EA + 1, 1) || MEM(EA, 1)
    
```

EA is the sum  $(rA|0) + rB$ . Bits 0–7 of the word in memory addressed by EA are loaded into the low-order 8 bits of  $rD$ . Bits 8–15 of the word in memory addressed by EA are loaded into the subsequent low-order 8 bits of  $rD$ . Bits 16–23 of the word in memory addressed by EA are loaded into the subsequent low-order eight bits of  $rD$ . Bits 24–31 of the word in memory addressed by EA are loaded into the subsequent low-order 8 bits of  $rD$ . The MPCxxx may run the **lwbrx** instructions with greater latency than other types of load instructions.

Other registers altered:

- None


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X

# lwz

Load Word and Zero

# lwz

**lwz** **rD,d(rA)**



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + EXTS(d)
rD ← MEM(EA, 4)
    
```

EA is the sum  $(rA|0) + d$ . The word in memory addressed by EA is loaded into rD.


Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D

Load Word and Zero with Update

**lwzu** **rD,d(rA)**



```
EA ← rA + EXTS(d)
rD ← MEM(EA, 4)
rA ← EA
```

EA is the sum (rA) + d. The word in memory addressed by EA is loaded into rD. EA is placed into rA. If rA = 0, or rA = rD, the instruction form is invalid.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D


# lwzux

Load Word and Zero with Update Indexed

# lwzux

**lwzux**                      **rD,rA,rB**

Reserved



$$EA \leftarrow (rA) + (rB)$$

$$rD \leftarrow MEM(EA, 4)$$

$$rA \leftarrow EA$$

EA is the sum (rA) + (rB). The word in memory addressed by EA is loaded into rD. EA is placed into rA. If rA = 0, or rA = rD, the instruction form is invalid.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X





# mcrxr


Move to Condition Register from XER

# mcrxr

**mcrxr**

**crfD**

Reserved



$$CR[4 * \mathit{crfD} - 4 * \mathit{crfD} + 3] \leftarrow XER[0-3]$$

$$XER[0-3] \leftarrow 0b0000$$

The contents of XER[0–3] are copied into the condition register field designated by **crfD**. All other fields of the condition register remain unchanged. XER[0–3] is cleared.

Other registers altered:

- Condition Register (CR field specified by operand **crfD**):  
Affected: LT, GT, EQ, SO
- XER[0–3]

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X

# mfcrr


Move from Condition Register

# mfcrr

mfcrr

rD

Reserved



$rD \leftarrow CR$

The contents of the condition register (CR) are placed into rD.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X



# mfmsr


Move from Machine State Register

# mfmsr

mfmsr

rD

Reserved



rD ← MSR

The contents of the MSR are placed into rD. This is a supervisor-level instruction.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
OEA	√		X

# mfspr


Move from Special-Purpose Register

# mfspir

mfspir

rD,SPR

Reserved



**\*Note:** This is a split field.

$$n \leftarrow \text{spr}[5-9] \ || \ \text{spr}[0-4]$$

$$rD \leftarrow \text{SPR}(n)$$

In the PowerPC UISA, the SPR field denotes a special-purpose register, encoded as shown in Table 9. The contents of the designated special-purpose register are placed into rD.

**Table 9. PowerPC UISA SPR Encodings for mfspr**

SPR**			Register Name
Decimal	spr[5-9]	spr[0-4]	
1	00000	00001	XER
8	00000	01000	LR
9	00000	01001	CTR

\*\* Note that the order of the two 5-bit halves of the SPR number is reversed compared with the actual instruction coding.

If the SPR field contains any value other than one of the values shown in Table 9 (and the processor is in *user mode*), one of the following occurs:

- The system illegal instruction error handler is invoked.
- The system supervisor-level instruction error handler is invoked.
- The results are boundedly undefined.

Other registers altered:

- None

Simplified mnemonics:

<b>mf<math>x</math>er rD</b>	equivalent to	<b>mf<math>s</math>spr rD,1</b>
<b>mf<math>l</math>r rD</b>	equivalent to	<b>mf<math>s</math>spr rD,8</b>
<b>mf<math>c</math>tr rD</b>	equivalent to	<b>mf<math>s</math>spr rD,9</b>

In the PowerPC OEA, the SPR field denotes a special-purpose register, encoded as shown in Table 10. The contents of the designated SPR are placed into rD. SPR[0] = 1 if and only if reading the register is supervisor-level. Execution of this instruction specifying a defined and supervisor-level register when MSR[PR] = 1 will result in a privileged instruction type program exception.

If MSR[PR] = 1, the only effect of executing an instruction with an SPR number that is not shown in Table 10 and has SPR[0] = 1 is to cause a supervisor-level instruction type program exception or an illegal instruction type program exception. For all other cases, MSR[PR] = 0 or SPR[0] = 0. If the SPR field contains any value that is not shown in Table 10, either an illegal instruction type program exception occurs or the results are boundedly undefined.

Other registers altered:

- None

**Table 10. PowerPC OEA SPR Encodings for mf $s$ spr**

SPR <sup>1</sup>			Register Name	Access
Decimal	spr[5–9]	spr[0–4]		
1	00000	00001	XER	User
8	00000	01000	LR	User
9	00000	01001	CTR	User
18	00000	10010	DSISR	Supervisor
19	00000	10011	DAR	Supervisor
22	00000	10110	DEC	Supervisor
26	00000	11010	SRR0	Supervisor
27	00000	11011	SRR1	Supervisor
80	00010	10000	EIE <sup>2</sup>	Supervisor
81	00010	10001	EID <sup>3</sup>	Supervisor
144	00100	10000	CMPA <sup>4</sup>	Supervisor
145	00100	10001	CMPB <sup>4</sup>	Supervisor
146	00100	10010	CMPC <sup>4</sup>	Supervisor
147	00100	10011	CMPD <sup>4</sup>	Supervisor
148	00100	10100	ICR <sup>4</sup>	Supervisor
149	00100	10101	DER <sup>4</sup>	Supervisor

**Table 10. PowerPC OEA SPR Encodings for mfspr (Continued)**

SPR <sup>1</sup>			Register Name	Access
Decimal	spr[5–9]	spr[0–4]		
150	00100	10110	COUNTA <sup>4</sup>	Supervisor
151	00100	10111	COUNTB <sup>4</sup>	Supervisor
152	00100	11000	CMPE <sup>4</sup>	Supervisor
153	00100	11001	CMPF <sup>4</sup>	Supervisor
154	00100	11010	CMPG <sup>4</sup>	Supervisor
155	00100	11011	CMPH <sup>4</sup>	Supervisor
156	00100	11100	LCTRL1 <sup>4</sup>	Supervisor
157	00100	11101	LCTRL2 <sup>4</sup>	Supervisor
158	00100	11110	ICTRL <sup>4</sup>	Supervisor
159	00100	11111	BAR <sup>4</sup>	Supervisor
272	01000	10000	SPRG0	Supervisor
273	01000	10001	SPRG1	Supervisor
274	01000	10010	SPRG2	Supervisor
275	01000	10011	SPRG3	Supervisor
287	01000	11111	PVR	Supervisor
560	10001	10000	IC_CST	Supervisor
561	10001	10001	IC_ADR	Supervisor
562	10001	10010	IC_DAT	Supervisor
568	10001	11000	DC_CST	Supervisor
569	10001	11001	DC_ADR	Supervisor
570	10001	11010	DC_DAT	Supervisor
630	10011	10110	DPDR <sup>4</sup>	Supervisor
638	10011	11110	IMMR	Supervisor
784	11000	10000	MI_CTR	Supervisor
786	11000	10010	MI_AP	Supervisor
787	11000	10011	MI_EPN	Supervisor
789	11000	10101	MI_TWC	Supervisor
790	11000	10110	MI_RPN	Supervisor
792	11000	11000	MD_CTR	Supervisor
793	11000	11001	M_CASID	Supervisor
794	11000	11010	MD_AP	Supervisor

**Table 10. PowerPC OEA SPR Encodings for mfspr (Continued)**

SPR <sup>1</sup>			Register Name	Access
Decimal	spr[5–9]	spr[0–4]		
795	11000	11011	MD_EPN	Supervisor
796	11000	11100	M_TWB	Supervisor
797	11000	11101	MD_TWC	Supervisor
798	11000	11110	MD_RPN	Supervisor
799	11000	11111	M_TW	Supervisor
816	11001	10000	MI_DBCAM	Supervisor
817	11001	10001	MI_DBRAM0	Supervisor
818	11001	10010	MI_DBRAM1	Supervisor
824	11001	11000	MD_DBCAM	Supervisor
825	11001	11001	MI_DBRAM0	Supervisor
826	11001	11010	MI_DBRAM1	Supervisor

<sup>1</sup>Note that the order of the two 5-bit halves of the SPR number is reversed compared with actual instruction coding.

<sup>2</sup>Sets EE Bit (Bit 16) in MSR.

<sup>3</sup>Clears EE Bit (Bit 16) in MSR.

<sup>4</sup>Development Support (Debug) Register.

For **mtspr** and **mfspr** instructions, the SPR number coded in assembly language does not appear directly as a 10-bit binary number in the instruction. The number coded is split into two 5-bit halves that are reversed in the instruction, with the high-order five bits appearing in bits 16–20 of the instruction and the low-order five bits in bits 11–15.

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA/OEA	√*		XFX

\* Note that **mfspr** is supervisor-level only if SPR[0] = 1.

# mftb


Move from Time Base

# mftb

**mftb**

rD,TBR

Reserved



**\*Note:** This is a split field.

```

n ← tbr[5-9] || tbr[0-4]
if n = 268 then
    rD ← TBL
else if n = 269 then
    rD ← TBU
    
```

**Table 11. TBR Encodings for mftb**

TBR*			Register Name	Access
Decimal	tbr[5-9]	tbr[0-4]		
268	01000	01100	TB Read	User
269	01000	01101	TBU Read	User

\*Note that the order of the two 5-bit halves of the TBR number is reversed.

If the TBR field contains any value other than one of the values shown in Table 11, then one of the following occurs:

- The system illegal instruction error handler is invoked.
- The system supervisor-level instruction error handler is invoked.
- The results are boundedly undefined.

It is important to note that some implementations may implement **mftb** and **mfspr** identically, therefore, a TBR number must not match an SPR number.

Other registers altered:

- None



Simplified mnemonics:

**mftb rD**  
**mftbu rD**

equivalent to  
equivalent to

**mftb rD,268**  
**mftb rD,269**

PowerPC Architecture Level	Supervisor Level	Optional	Form
VEA			AFX


# mtcrf

Move to Condition Register Fields

# mtcrf

**mtcrf** CRM,rS

Reserved



$$\text{mask} \leftarrow (4)(\text{CRM}[0]) \mid (4)(\text{CRM}[1]) \mid \dots \mid (4)(\text{CRM}[7])$$

$$\text{CR} \leftarrow (\text{rS} \ \& \ \text{mask}) \mid (\text{CR} \ \& \ \neg \text{mask})$$

The contents of rS are placed into the condition register under control of the field mask specified by CRM. The field mask identifies the 4-bit fields affected. Let i be an integer in the range 0–7. If CRM(i) = 1, CR field i (CR bits 4 \* i through 4 \* i + 3) is set to the contents of the corresponding field of rS.

Note that updating a subset of the eight fields of the condition register may have substantially poorer performance on some implementations than updating all of the fields.

Other registers altered:

- CR fields selected by mask

Simplified mnemonics:

**mtcr** rS equivalent to **mtcrf** 0xFF,rS

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XFX



# mtmsr


Move to Machine State Register

# mtmsr

mtmsr

rS

Reserved



$$MSR \leftarrow (rS)$$

The contents of rS are placed into the MSR. This is a supervisor-level instruction. It is also an execution synchronizing instruction except with respect to alterations to the POW and LE bits.

In addition, alterations to the MSR[EE] and MSR[RI] bits are effective as soon as the instruction completes. Thus if MSR[EE] = 0 and an external or decremter exception is pending, executing an **mtmsr** instruction that sets MSR[EE] = 1 will cause the external or decremter exception to be taken before the next instruction is executed, if no higher priority exception exists.

Other registers altered:

- MSR

PowerPC Architecture Level	Supervisor Level	Optional	Form
OEA	√		X


# mtspr

Move to Special-Purpose Register

# mtspr

**mtspr** SPR,rS

Reserved



**\*Note:** This is a split field.

$$n \leftarrow \text{spr}[5-9] \ || \ \text{spr}[0-4]$$

$$\underline{\underline{\text{SPR}(n) \leftarrow \text{rS}}}$$

In the PowerPC UISA, the SPR field denotes a special-purpose register, encoded as shown in Table 12. The contents of rS are placed into the designated special-purpose register.

**Table 12. PowerPC UISA SPR Encodings for mtspr**

SPR**			Register Name
Decimal	spr[5-9]	spr[0-4]	
1	00000	00001	XER
8	00000	01000	LR
9	00000	01001	CTR

\*\* Note that the order of the two 5-bit halves of the SPR number is reversed compared with actual instruction coding.

If the SPR field contains any value other than one of the values shown in Table 12, and the processor is operating in user mode, one of the following occurs:

- The system illegal instruction error handler is invoked.
- The system supervisor instruction error handler is invoked.
- The results are boundedly undefined.

Other registers altered:

- See Table 12.

Simplified mnemonics:

**mtxer** rD                      equivalent to                      **mtspr 1,rD**  
**mtlr** rD                        equivalent to                      **mtspr 8,rD**  
**mtctr** rD                      equivalent to                      **mtspr 9,rD**

In the PowerPC OEA, the SPR field denotes a special-purpose register, encoded as shown in Table 13. The contents of rS are placed into the designated special-purpose register. For this instruction, SPRs TBL and TBU are treated as separate 32-bit registers; setting one leaves the other unaltered.

The value of SPR[0] = 1 if and only if writing the register is a supervisor-level operation. Execution of this instruction specifying a defined and supervisor-level register when MSR[PR] = 1 results in a privileged instruction type program exception.

If MSR[PR] = 1 then the only effect of executing an instruction with an SPR number that is not shown in Table 13 and has SPR[0] = 1 is to cause a privileged instruction type program exception or an illegal instruction type program exception. For all other cases, MSR[PR] = 0 or SPR[0] = 0, if the SPR field contains any value that is not shown in Table 13, either an illegal instruction type program exception occurs or the results are boundedly undefined.

Other registers altered:

- See Table 13.

**Table 13. PowerPC OEA SPR Encodings for mtspr**

SPR <sup>1</sup>			Register Name	Access
Decimal	spr[5–9]	spr[0–4]		
1	00000	00001	XER	User
8	00000	01000	LR	User
9	00000	01001	CTR	User
18	00000	10010	DSISR	Supervisor
19	00000	10011	DAR	Supervisor
22	00000	10110	DEC	Supervisor
26	00000	11010	SRR0	Supervisor
27	00000	11011	SRR1	Supervisor
80	00010	10000	EIE <sup>2</sup>	Supervisor
81	00010	10001	EID <sup>3</sup>	Supervisor
144	00100	10000	CMPA <sup>4</sup>	Supervisor
145	00100	10001	CMPB <sup>4</sup>	Supervisor
146	00100	10010	CMPC <sup>4</sup>	Supervisor
147	00100	10011	CMPD <sup>4</sup>	Supervisor

**Table 13. PowerPC OEA SPR Encodings for mtspr (Continued)**

SPR <sup>1</sup>			Register Name	Access
Decimal	spr[5–9]	spr[0–4]		
148	00100	10100	ICR <sup>4</sup>	Supervisor
149	00100	10101	DER <sup>4</sup>	Supervisor
150	00100	10110	COUNTA <sup>4</sup>	Supervisor
151	00100	10111	COUNTB <sup>4</sup>	Supervisor
152	00100	11000	CMPE <sup>4</sup>	Supervisor
153	00100	11001	CMPF <sup>4</sup>	Supervisor
154	00100	11010	CMPG <sup>4</sup>	Supervisor
155	00100	11011	CMPH <sup>4</sup>	Supervisor
156	00100	11100	LCTRL1 <sup>4</sup>	Supervisor
157	00100	11101	LCTRL2 <sup>4</sup>	Supervisor
158	00100	11110	ICTRL <sup>4</sup>	Supervisor
159	00100	11111	BAR <sup>4</sup>	Supervisor
272	01000	10000	SPRG0	Supervisor
273	01000	10001	SPRG1	Supervisor
274	01000	10010	SPRG2	Supervisor
275	01000	10011	SPRG3	Supervisor
284	01000	11100	TB Write	Supervisor
285	01000	11101	TBU Write	Supervisor
560	10001	10000	IC_CST	Supervisor
561	10001	10001	IC_ADR	Supervisor
562	10001	10010	IC_DAT	Supervisor
568	10001	11000	DC_CST	Supervisor
569	10001	11001	DC_ADR	Supervisor
570	10001	11010	DC_DAT	Supervisor
630	10011	10110	DPDR <sup>4</sup>	Supervisor
638	10011	11110	IMMR	Supervisor
784	11000	10000	MI_CTR	Supervisor
786	11000	10010	MI_AP	Supervisor
787	11000	10011	MI_EPN	Supervisor
789	11000	10101	MI_TWC	Supervisor
790	11000	10110	MI_RPN	Supervisor

**Table 13. PowerPC OEA SPR Encodings for mtspr (Continued)**

SPR <sup>1</sup>			Register Name	Access
Decimal	spr[5–9]	spr[0–4]		
792	11000	11000	MD_CTR	Supervisor
793	11000	11001	M_CASID	Supervisor
794	11000	11010	MD_AP	Supervisor
795	11000	11011	MD_EPN	Supervisor
796	11000	11100	M_TWB	Supervisor
797	11000	11101	MD_TWC	Supervisor
798	11000	11110	MD_RPN	Supervisor
799	11000	11111	M_TW	Supervisor
816	11001	10000	MI_DBCAM	Supervisor
817	11001	10001	MI_DBRAM0	Supervisor
818	11001	10010	MI_DBRAM1	Supervisor
824	11001	11000	MD_DBCAM	Supervisor
825	11001	11001	MI_DBRAM0	Supervisor
826	11001	11010	MI_DBRAM1	Supervisor

<sup>1</sup>Note that the order of the two 5-bit halves of the SPR number is reversed. For **mtspr** and **mfspr** instructions, the SPR number coded in assembly language does not appear directly as a 10-bit binary number in the instruction. The number coded is split into two 5-bit halves that are reversed in the instruction, with the high-order five bits appearing in bits 16–20 of the instruction and the low-order five bits in bits 11–15.

<sup>2</sup>Sets EE Bit (Bit 16) in MSR.

<sup>3</sup>Clears EE Bit (Bit 16) in MSR.

<sup>4</sup>Development Support (Debug) Register.

PowerPC Architecture Level	Supervisor Level	Optional	Form
UIA/OEA	√*		XFX

\* Note that **mtspr** is supervisor-level only if SPR[0] = 1.


# mulhw<sub>x</sub>

Multiply High Word

# mulhw<sub>x</sub>

**mulhw**                      rD,rA,rB                      (Rc = 0)  
**mulhw.**                      rD,rA,rB                      (Rc = 1)

Reserved



```
prod[0-63] ← rA * rB
rD ← prod[0-31]
```

The 64-bit product is formed from the contents of rA and rB. The high-order 32 bits of the 64-bit product of the operands are placed into rD. Both the operands and the product are interpreted as signed integers. This instruction may execute faster on some implementations if rB contains the operand having the smaller absolute value.

Other registers altered:

- Condition Register (CR0 field):  
     Affected: LT, GT, EQ, SO (if Rc = 1)

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XO


# mulhwu<sub>x</sub>

Multiply High Word Unsigned

# mulhwu<sub>x</sub>

**mulhwu**                      rD,rA,rB                      (Rc = 0)  
**mulhwu.**                      rD,rA,rB                      (Rc = 1)

Reserved



$prod[0-63] \leftarrow rA * rB$   
 $rD \leftarrow prod[0-31]$

The 32-bit operands are the contents of rA and rB. The high-order 32 bits of the 64-bit product of the operands are placed into rD. Both the operands and the product are interpreted as unsigned integers, except that if Rc = 1 the first three bits of CR0 field are set by signed comparison of the result to zero. This instruction may execute faster on some implementations if rB contains the operand having the smaller absolute value.

Other registers altered:

- Condition Register (CR0 field):  
 Affected: LT, GT, EQ, SO(if Rc = 1)


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XO

# mulli

Multiply Low Immediate

# mulli

**mulli**                      rD,rA,SIMM



```
prod[0-48] ← (rA) * SIMM
rD ← prod[16-48]
```

The first operand is (rA). The 16-bit second operand is the value of the SIMM field. The low-order 32-bits of the 48-bit product of the operands are placed into rD. Both the operands and the product are interpreted as signed integers. The low-order 32 bits of the product are calculated independently of whether the operands are treated as signed or unsigned 32-bit integers. This instruction can be used with **mulhdx** or **mulhwx** to calculate a full 64-bit product.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D




# mullw<sub>x</sub>

Multiply Low Word

# mullw<sub>x</sub>

<b>mullw</b>	rD,rA,rB	(OE = 0 Rc = 0)
<b>mullw.</b>	rD,rA,rB	(OE = 0 Rc = 1)
<b>mullwo</b>	rD,rA,rB	(OE = 1 Rc = 0)
<b>mullwo.</b>	rD,rA,rB	(OE = 1 Rc = 1)



$$rD \leftarrow rA * rB$$

The 32-bit operands are the contents of rA and rB. The low-order 32 bits of the 64-bit product (rA) \* (rB) are placed into rD. The low-order 32 bits of the product are the correct 32-bit product for 32-bit implementations. The low-order 32-bits of the product are independent of whether the operands are regarded as signed or unsigned 32-bit integers. If OE = 1, then OV is set if the product cannot be represented in 32 bits. Both the operands and the product are interpreted as signed integers.

Note that this instruction may execute faster on some implementations if rB contains the operand having the smaller absolute value.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO(if Rc = 1)  
**Note:** CR0 field may not reflect the “true” (infinitely precise) result if overflow occurs (see XER below).
- XER:  
Affected: SO, OV(if OE = 1)  
**Note:** The setting of the affected bits in the XER is mode-independent, and reflects overflow of the 32-bit result.

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XO




# nand<sub>x</sub>

NAND

# nand<sub>x</sub>

**nand**                      rA,rS,rB                      (Rc = 0)

**nand.**                      rA,rS,rB                      (Rc = 1)



$$rA \leftarrow \neg ((rS) \& (rB))$$

The contents of rS are ANDed with the contents of rB and the complemented result is placed into rA. **nand** with rS = rB can be used to obtain the one's complement.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO(if Rc = 1)

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X






# nor<sub>x</sub>

NOR

# nor<sub>x</sub>

**nor**                      rA,rS,rB              (Rc = 0)  
**nor.**                      rA,rS,rB              (Rc = 1)



$$rA \leftarrow \neg ((rS) | (rB))$$

The contents of rS are ORed with the contents of rB and the complemented result is placed into rA. **nor** with rS = rB can be used to obtain the one's complement.

Other registers altered:

- Condition Register (CR0 field):  
     Affected: LT, GT, EQ, SO(if Rc = 1)

Simplified mnemonics:

**not** rD,rS                      equivalent to              **nor** rA,rS,rS

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X




# orx

# orx

OR

**or**                                    rA,rS,rB                    (Rc = 0)  
**or.**                                    rA,rS,rB                    (Rc = 1)



$$rA \leftarrow (rS) \mid (rB)$$

The contents of rS are ORed with the contents of rB and the result is placed into rA. The simplified mnemonic **mr** (shown below) demonstrates the use of the **or** instruction to move register contents.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO(if Rc = 1)

Simplified mnemonics:

**mr** rA,rS                                    equivalent to                    **or** rA,rS,rS

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X






# ori

OR Immediate

# ori

**ori**                      rA,rS,UIMM



$$rA \leftarrow (rS) \mid ((\underline{16})0 \mid \mid UIMM)$$

The contents of rS are ORed with 0x0000|| UIMM and the result is placed into rA. The preferred no-op (an instruction that does nothing) is **ori 0,0,0**.

Other registers altered:

- None

Simplified mnemonics:

**nop**                      equivalent to              **ori 0,0,0**

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D




# oris

OR Immediate Shifted

# oris

**oris**                    rA,rS,UIMM



$$rA \leftarrow (rS) \mid (UIMM \mid \mid (16)0)$$

The contents of rS are ORed with UIMM || 0x0000 and the result is placed into rA.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D




# rfi

Return from Interrupt

# rfi

Reserved



$MSR[16-23, 25-27, 30-31] \leftarrow SRR1[16-23, 25-27, 30-31]$

$NIA \leftarrow iea\ SRR0[0-29] \ ||\ 0b00$

Bits SRR1[0,5-9,16-31] are placed into the corresponding bits of the MSR. If the new MSR value does not enable any pending exceptions, then the next instruction is fetched, under control of the new MSR value, from the address SRR0[0-29] || 0b00. If the new MSR value enables one or more pending exceptions, the exception associated with the highest priority pending exception is generated; in this case the value placed into SRR0 by the exception processing mechanism is the address of the instruction that would have been executed next had the exception not occurred. Note that an implementation may define additional MSR bits, and in this case, may also cause them to be saved to SRR1 from MSR on an exception and restored to MSR from SRR1 on an **rfi**. This is a supervisor-level, context synchronizing instruction.

Other registers altered:

- MSR

PowerPC Architecture Level	Supervisor Level	Optional	Form
OEA	√		XL


# rlwimix

# rlwimix

Rotate Left Word Immediate then Mask Insert

**rlwimi**             $rA, rS, SH, MB, ME$             ( $Rc = 0$ )

**rlwimi.**             $rA, rS, SH, MB, ME$             ( $Rc = 1$ )



```

n ← SH
r ← ROTL(rS, n)
m ← MASK(MB, ME)
rA ← (r & m) | (rA & ~ m)

```

The contents of  $rS$  are rotated left the number of bits specified by operand  $SH$ . A mask is generated having 1 bits from bit  $MB$  through bit  $ME$  and 0 bits elsewhere. The rotated data is inserted into  $rA$  under control of the generated mask.

Note that **rlwimi** can be used to insert a bit field into the contents of  $rA$  using the methods shown below:

- To insert an  $n$ -bit field, that is left-justified  $rS$ , into  $rA$  starting at bit position  $b$ , set  $SH = 32 - b$ ,  $MB = b$ , and  $ME = (b + n) - 1$ .
- To insert an  $n$ -bit field, that is right-justified in  $rS$ , into  $rA$  starting at bit position  $b$ , set  $SH = 32 - (b + n)$ ,  $MB = b$ , and  $ME = (b + n) - 1$ .

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO(if  $Rc = 1$ )

Simplified mnemonics:

**inslwi**  $rA, rS, n, b$             equivalent to **rlwimi**             $rA, rS, 32 - b, b, b + n - 1$   
**insrwi**  $rA, rS, n, b$  ( $n > 0$ )            equivalent to **rlwimi**             $rA, rS, 32 - (b + n), b, (b + n) - 1$

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			M


## rlwinm<sub>x</sub>

Rotate Left Word Immediate then AND with Mask

## rlwinm<sub>x</sub>

**rlwinm**            **rA,rS,SH,MB,ME**            (**Rc = 0**)

**rlwinm.**            **rA,rS,SH,MB,ME**            (**Rc = 1**)



```

n ← SH
r ← ROTL(rS, n)
m ← MASK(MB, ME)
rA ← r & m

```

The contents of **rS** are rotated left the number of bits specified by operand **SH**. A mask is generated having 1 bits from bit **MB** through bit **ME** and 0 bits elsewhere. The rotated data is ANDed with the generated mask and the result is placed into **rA**.

Note that **rlwinm** can be used to extract, rotate, shift, and clear bit fields using the methods shown below:

- To extract an *n*-bit field, that starts at bit position *b* in **rS**, right-justified into **rA** (clearing the remaining  $32 - n$  bits of **rA**), set  $SH = b + n$ ,  $MB = 32 - n$ , and  $ME = 31$ .
- To extract an *n*-bit field, that starts at bit position *b* in **rS**, left-justified into **rA** (clearing the remaining  $32 - n$  bits of **rA**), set  $SH = b$ ,  $MB = 0$ , and  $ME = n - 1$ .
- To rotate the contents of a register left (or right) by *n* bits, set  $SH = n (32 - n)$ ,  $MB = 0$ , and  $ME = 31$ .
- To shift the contents of a register right by *n* bits, by setting  $SH = 32 - n$ ,  $MB = n$ , and  $ME = 31$ . It can be used to clear the high-order *b* bits of a register and then shift the result left by *n* bits by setting  $SH = n$ ,  $MB = b - n$  and  $ME = 31 - n$ .
- To clear the low-order *n* bits of a register, by setting  $SH = 0$ ,  $MB = 0$ , and  $ME = 31 - n$ .

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO(if  $Rc = 1$ )



Simplified mnemonics:

<b>extlwi</b> $rA, rS, n, b$ ( $n > 0$ )	equivalent to	<b>rlwinm</b> $rA, rS, b, 0, n - 1$
<b>extrwi</b> $rA, rS, n, b$ ( $n > 0$ )	equivalent to	<b>rlwinm</b> $rA, rS, b + n, 32 - n, 31$
<b>rotlwi</b> $rA, rS, n$	equivalent to	<b>rlwinm</b> $rA, rS, n, 0, 31$
<b>rotlwi</b> $rA, rS, n$	equivalent to	<b>rlwinm</b> $rA, rS, 32 - n, 0, 31$
<b>slwi</b> $rA, rS, n$ ( $n < 32$ )	equivalent to	<b>rlwinm</b> $rA, rS, n, 0, 31 - n$
<b>srwi</b> $rA, rS, n$ ( $n < 32$ )	equivalent to	<b>rlwinm</b> $rA, rS, 32 - n, n, 31$
<b>clrlwi</b> $rA, rS, n$ ( $n < 32$ )	equivalent to	<b>rlwinm</b> $rA, rS, 0, n, 31$
<b>clrrwi</b> $rA, rS, n$ ( $n < 32$ )	equivalent to	<b>rlwinm</b> $rA, rS, 0, 0, 31 - n$
<b>clrlslwi</b> $rA, rS, b, n$ ( $n \leq b < 32$ )	equivalent to	<b>rlwinm</b> $rA, rS, n, b - n, 31 - n$


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			M



# SC

System Call

# SC

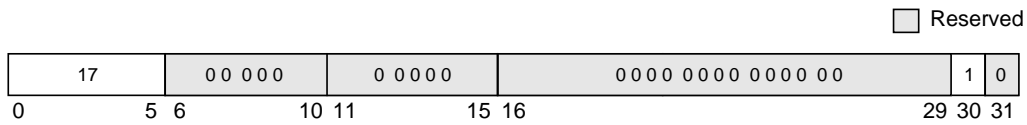

The **sc** instruction calls the operating system to perform a service. When control is returned to the program that executed the system call, the content of the registers depends on the register conventions used by the program providing the system service.

The effective address of the instruction following the **sc** instruction is placed into SRR0. Bits 0, 5-9, and 16-31 of the MSR are placed into the corresponding bits of SRR1, and bits 1-4 and 10-15 of SRR1 are set to undefined values. An **sc** exception is generated. The exception alters the MSR. The exception causes the next instruction to be fetched from offset 0xC00 from the base real address indicated by the new setting of MSR[IP].

Other registers altered:

- Dependent on the system service
- SRR0
- SRR1
- MSR


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA/OEA			SC

# slw<sub>x</sub>

Shift Left Word

# slw<sub>x</sub>

**slw**                                    rA,rS,rB                    (Rc = 0)  
**slw.**                                    rA,rS,rB                    (Rc = 1)



$n \leftarrow rB[27-31]$   
 $rA \leftarrow ROTL(rS, n)$

If bit 26 of rB = 0, the contents of rS are shifted left the number of bits specified by rB[27–31]. Bits shifted out of position 0 are lost. Zeros are supplied to the vacated positions on the right. The 32-bit result is placed into rA. If bit 26 of rB = 1, 32 zeros are placed into rA.

Other registers altered:

- Condition Register (CR0 field):  
     Affected: LT, GT, EQ, SO(if Rc = 1)


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X

## sraw<sub>x</sub>

Shift Right Algebraic Word

## sraw<sub>x</sub>

**sraw**                      rA,rS,rB                      (Rc = 0)  
**sraw.**                      rA,rS,rB                      (Rc = 1)



$n \leftarrow rB[27-31]$   
 $rA \leftarrow ROTL(rS, n)$

If  $rB[26] = 0$ , then the contents of  $rS$  are shifted right the number of bits specified by  $rB[27-31]$ . Bits shifted out of position 31 are lost. The result is padded on the left with sign bits before being placed into  $rA$ . If  $rB[26] = 1$ , then  $rA$  is filled with 32 sign bits (bit 0) from  $rS$ . CR0 is set based on the value written into  $rA$ . XER[CA] is set if  $rS$  contains a negative number and any 1 bits are shifted out of position 31; otherwise XER[CA] is cleared. A shift amount of zero causes XER[CA] to be cleared.

Note that the **sraw** instruction, followed by **addze**, can be used to divide quickly by  $2^n$ . The setting of the XER[CA] bit, by **sraw**, is independent of mode.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO(if Rc = 1)
- XER:  
Affected: CA




# srawi<sub>x</sub>

Shift Right Algebraic Word Immediate

# srawi<sub>x</sub>

**srawi**                      rA,rS,SH                      (Rc = 0)  
**srawi.**                      rA,rS,SH                      (Rc = 1)



$$n \leftarrow SH$$

$$r \leftarrow ROTL(rS, 32 - n)$$

The contents of rS are shifted right the number of bits specified by operand SH. Bits shifted out of position 31 are lost. The shifted value is sign-extended before being placed in rA. The 32-bit result is placed into rA. XER[CA] is set if rS contains a negative number and any 1 bits are shifted out of position 31; otherwise XER[CA] is cleared. A shift amount of zero causes XER[CA] to be cleared.

Note that the **srawi** instruction, followed by **addze**, can be used to divide quickly by  $2^n$ . The setting of the CA bit, by **srawi**, is independent of mode.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO (if Rc = 1)
- XER:  
Affected: CA

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X




## srw<sub>x</sub>

Shift Right Word

## srw<sub>x</sub>

**srw**                                    rA,rS,rB                    (Rc = 0)

**srw.**                                    rA,rS,rB                    (Rc = 1)



$$n \leftarrow rB[27-31]$$

$$r \leftarrow ROTL(rS, 32 - n)$$

The contents of rS are shifted right the number of bits specified by the low-order six bits of rB. Bits shifted out of position 31 are lost. Zeros are supplied to the vacated positions on the left. The result is placed into rA.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO(if Rc = 1)

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X






# stbux

Store Byte with Update Indexed

# stbux

**stbux**                      rS,rA,rB

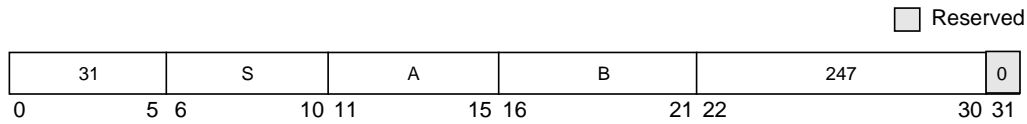

$EA \leftarrow (rA) + (rB)$   
 $MEM(EA, 1) \leftarrow rS[24-31]$   
 $rA \leftarrow EA$

EA is the sum (rA) + (rB). The contents of the low-order eight bits of rS are stored into the byte in memory addressed by EA. EA is placed into rA. If rA = 0, the instruction form is invalid.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X




# stbx

Store Byte Indexed

# stbx

**stbx**                      rS,rA,rB

Reserved



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
MEM(EA, 1) ← rS[24-31]

```

EA is the sum (rA|0) + (rB). The contents of the low-order eight bits of rS are stored into the byte in memory addressed by EA.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X




# sthbrx

Store Half Word Byte-Reverse Indexed

# sthbrx

**sthbrx**                      **rS,rA,rB**

Reserved



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
MEM(EA, 2) ← rS[24-31] || rS[16-23]

```

EA is the sum (rA|0) + (rB). The contents of the low-order eight bits of rS are stored into bits 0–7 of the half word in memory addressed by EA. The contents of the subsequent low-order eight bits of rS are stored into bits 8–15 of the half word in memory addressed by EA.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X






# sthux

Store Half Word with Update Indexed

# sthux

**sthux**                      **rS,rA,rB**

Reserved



```
EA ← (rA) + (rB)
MEM(EA, 2) ← rS[16-31]
rA ← EA
```

EA is the sum (rA) + (rB). The contents of the low-order 16 bits of rS are stored into the half word in memory addressed by EA. EA is placed into rA. If rA = 0, the instruction form is invalid.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X


# sthx

Store Half Word Indexed

# sthx

**sthx**                      **rS,rA,rB**

Reserved



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
MEM(EA, 2) ← rS[16-31]

```

EA is the sum (rA|0) + (rB). The contents of the low-order 16 bits of rS are stored into the half word in memory addressed by EA.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X




# stswi

Store String Word Immediate

# stswi

**stswi**                      rS,rA,NB

Reserved



```

if rA = 0 then EA ← 0
else EA ← (rA)
if NB = 0 then n ← 32
else n ← NB
r ← rS - 1
i ← 32
do while n > 0
  if i = 32 then r ← r + 1 (mod 32)
  MEM(EA, 1) ← GPR(r)[i-i + 7]
  i ← i + 8
  if i = 64 then i ← 32
  EA ← EA + 1
  n ← n - 1

```

EA is (rA|0). Let  $n = NB$  if  $NB \neq 0$ ,  $n = 32$  if  $NB = 0$ ;  $n$  is the number of bytes to store. Let  $nr = \text{CEIL}(n \div 4)$ ;  $nr$  is the number of registers to supply data.  $n$  consecutive bytes starting at EA are stored from GPRs rS through rS + nr - 1. Bytes are stored left to right from each register. The sequence of registers wraps around through r0 if required. Under certain conditions (for example, segment boundary crossing) the data alignment exception handler may be invoked.

Note that, in some implementations, this instruction is likely to have a greater latency and take longer to execute, perhaps much longer, than a sequence of individual load or store instructions that produce the same results.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X


# stswx

Store String Word Indexed

# stswx

stswx                      rS,rA,rB

Reserved



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
n ← XER[25-31]
r ← rS - 1
i ← 32
do while n > 0
  if i = 32 then r ← r + 1 (mod 32)
  MEM(EA, 1) ← GPR(r)[i-i + 7]
  i ← i + 8
  if i = 64 then i ← 32
  EA ← EA + 1
  n ← n - 1

```

EA is the sum (rA|0) + (rB). Let  $n = XER[25-31]$ ;  $n$  is the number of bytes to store. Let  $nr = CEIL(n \div 4)$ ;  $nr$  is the number of registers to supply data.  $n$  consecutive bytes starting at EA are stored from GPRs rS through rS + nr - 1. Bytes are stored left to right from each register. The sequence of registers wraps around through r0 if required. If  $n = 0$ , no bytes are stored. Under certain conditions (for example, segment boundary crossing) the data alignment exception handler may be invoked.

Note that, in some implementations, this instruction is likely to have a greater latency and take longer to execute, perhaps much longer, than a sequence of individual load or store instructions that produce the same results.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X




# stwbrx

Store Word Byte-Reverse Indexed

# stwbrx

**stwbrx**                      rS,rA,rB

Reserved



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
MEM(EA, 4) ← rS[24-31] || rS[16-23] || rS[8-15] || rS[0-7]

```

EA is the sum (rA|0) + (rB). The contents of the low-order eight bits of rS are stored into bits 0–7 of the word in memory addressed by EA. The contents of the subsequent eight low-order bits of rS are stored into bits 8–15 of the word in memory addressed by EA. The contents of the subsequent eight low-order bits of rS are stored into bits 16–23 of the word in memory addressed by EA. The contents of the subsequent eight low-order bits of rS are stored into bits 24–31 of the word in memory addressed by EA.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X







EA must be a multiple of four. If it is not, either the system alignment exception handler is invoked or the results are boundedly undefined.

The granularity with which reservations are managed is *implementation-dependent*. Therefore, the memory to be accessed by the load and reserve and store conditional instructions should be allocated by a system library program.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO

PowerPC Architecture Level	Supervisor Level	Optional	Form
UIA			X




# stwux

Store Word with Update Indexed

# stwux

**stwux**                      **rS,rA,rB**

Reserved



$EA \leftarrow (rA) + (rB)$   
 $MEM(EA, 4) \leftarrow rS$   
 $rA \leftarrow EA$

EA is the sum (rA) + (rB). The contents of rS are stored into the word in memory addressed by EA. EA is placed into rA. If rA = 0, the instruction form is invalid.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X


# stwx

Store Word Indexed

# stwx

**stwx**                      rS,rA,rB

Reserved



```

if rA = 0 then b ← 0
else b ← (rA)
EA ← b + (rB)
MEM(EA, 4) ← rS

```

EA is the sum (rA|0) + (rB). The contents of rS are is stored into the word in memory addressed by EA.

Other registers altered:

- None


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X

# sub<sub>x</sub>

Subtract From

# sub<sub>x</sub>

<b>subf</b>	rD,rA,rB	(OE = 0 Rc = 0)
<b>subf.</b>	rD,rA,rB	(OE = 0 Rc = 1)
<b>subfo</b>	rD,rA,rB	(OE = 1 Rc = 0)
<b>subfo.</b>	rD,rA,rB	(OE = 1 Rc = 1)



$$rD \leftarrow \neg (rA) + (rB) + 1$$

The sum  $\neg (rA) + (rB) + 1$  is placed into rD. The **subf** instruction is preferred for subtraction because it sets few status bits.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO(if Rc = 1)
- XER:  
Affected: SO, OV(if OE = 1)

Simplified mnemonics:

**sub** rD,rA,rB                      equivalent to                      **subf** rD,rB,rA


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XO

## subfc<sub>x</sub>

Subtract from Carrying

**subfc**                    rD,rA,rB    (OE = 0 Rc = 0)  
**subfc.**                  rD,rA,rB    (OE = 0 Rc = 1)  
**subfco**                 rD,rA,rB    (OE = 1 Rc = 0)  
**subfco.**                rD,rA,rB    (OE = 1 Rc = 1)

## subfc<sub>x</sub>



$$rD \leftarrow \neg (rA) + (rB) + 1$$

The sum  $\neg (rA) + (rB) + 1$  is placed into rD.

Other registers altered:

- Condition Register (CR0 field):  
 Affected: LT, GT, EQ, SO (if Rc = 1)  
**Note:** CR0 field may not reflect the “true” (infinitely precise) result if overflow occurs (see XER below).
- XER:  
 Affected: CA  
 Affected: SO, OV (if OE = 1)

Simplified mnemonics:

**subc** rD,rA,rB                    equivalent to                    **subfc** rD,rB,rA

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XO




## subfe<sub>x</sub>

Subtract from Extended

**subfe**                      rD,rA,rB      (OE = 0 R<sub>c</sub> = 0)  
**subfe.**                     rD,rA,rB      (OE = 0 R<sub>c</sub> = 1)  
**subfeo**                    rD,rA,rB      (OE = 1 R<sub>c</sub> = 0)  
**subfeo.**                   rD,rA,rB      (OE = 1 R<sub>c</sub> = 1)

## subfe<sub>x</sub>



$$rD \leftarrow \neg (rA) + (rB) + XER[CA]$$

The sum  $\neg (rA) + (rB) + XER[CA]$  is placed into rD.

Other registers altered:

- Condition Register (CR0 field):  
 Affected: LT, GT, EQ, SO(if R<sub>c</sub> = 1)  
**Note:** CR0 field may not reflect the “true” (infinitely precise) result if overflow occurs (see XER below).
- XER:  
 Affected: CA  
 Affected: SO, OV(if OE = 1)

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XO




# subfic

Subtract from Immediate Carrying

# subfic

**subfic**                    rD,rA,SIMM



$$rD \leftarrow \neg (rA) + \text{EXTS}(\text{SIMM}) + 1$$

The sum  $\neg (rA) + \text{EXTS}(\text{SIMM}) + 1$  is placed into rD.

Other registers altered:

- XER:  
  Affected: CA

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D


# subfme<sub>x</sub>

Subtract from Minus One Extended

# subfme<sub>x</sub>

<b>subfme</b>	rD,rA	(OE = 0 Rc = 0)
<b>subfme.</b>	rD,rA	(OE = 0 Rc = 1)
<b>subfmeo</b>	rD,rA	(OE = 1 Rc = 0)
<b>subfmeo.</b>	rD,rA	(OE = 1 Rc = 1)

Reserved



$$rD \leftarrow \neg (rA) + XER[CA] - 1$$

The sum  $\neg (rA) + XER[CA] + (32)1$  is placed into rD.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO(if Rc = 1)  
**Note:** CR0 field may not reflect the “true” (infinitely precise) result if overflow occurs (see XER below).
- XER:  
Affected: CA  
Affected: SO, OV(if OE = 1)

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XO


# subfze<sub>x</sub>

Subtract from Zero Extended

# subfze<sub>x</sub>

<b>subfze</b>	rD,rA	(OE = 0 Rc = 0)
<b>subfze.</b>	rD,rA	(OE = 0 Rc = 1)
<b>subfzeo</b>	rD,rA	(OE = 1 Rc = 0)
<b>subfzeo.</b>	rD,rA	(OE = 1 Rc = 1)

Reserved



$$rD \leftarrow \neg (rA) + XER[CA]$$

The sum  $\neg (rA) + XER[CA]$  is placed into rD.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO(if Rc = 1)  
**Note:** CR0 field may not reflect the “true” (infinitely precise) result if overflow occurs (see XER below).
- XER:  
Affected: CA  
Affected: SO, OV(if OE = 1)


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			XO

## sync

Synchronize

## sync

Reserved



The **sync** instruction provides an ordering function for the effects of all instructions executed by a given processor. Executing a **sync** instruction ensures that all instructions preceding the **sync** instruction appear to have completed before the **sync** instruction completes, and that no subsequent instructions are initiated by the processor until after the **sync** instruction completes. When the **sync** instruction completes, all external accesses caused by instructions preceding the **sync** instruction will have been performed with respect to all other mechanisms that access memory.

Multiprocessor implementations also send a **sync** address-only broadcast that is useful in some designs. For example, if a design has an external buffer that re-orders loads and stores for better bus efficiency, the **sync** broadcast signals to that buffer that previous loads/stores must be completed before any following loads/stores.

The **sync** instruction can be used to ensure that the results of all stores into a data structure, caused by store instructions executed in a “critical section” of a program, are seen by other processors before the data structure is seen as unlocked.

The functions performed by the **sync** instruction will normally take a significant amount of time to complete, so indiscriminate use of this instruction may adversely affect performance. In addition, the time required to execute **sync** may vary from one execution to another. The **eieio** instruction may be more appropriate than **sync** for many cases.

Other registers altered:


- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X

# tlbia

Translation Lookaside Buffer Invalidate All

# tlbia

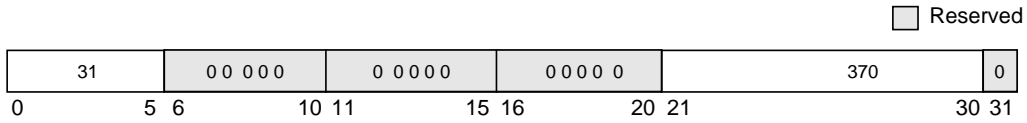

All TLB entries ← invalid

The entire *translation lookaside buffer (TLB)* is invalidated (that is, all entries are removed). The TLB is invalidated regardless of the settings of MSR[IR] and MSR[DR]. The invalidation is done without reference to the SLB or segment table. This instruction does not cause the entries to be invalidated in other processors. This is a supervisor-level instruction.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
OEA	√	√	X

# tlbie


Translation Lookaside Buffer Invalidate Entry

# tlbie

tlbie

rB

Reserved



VPS ← rB[4-19]  
 Identify TLB entries corresponding to VPS  
 Each such TLB entry ← invalid

EA is the contents of rB. If the translation lookaside buffer (TLB) contains an entry corresponding to EA, that entry is made invalid (that is, removed from the TLB).

*Multiprocessing* implementations (for example, the 601, and 604) send a **tlbie** address-only broadcast over the address bus to tell other processors to invalidate the same TLB entry in their TLBs.

The TLB search is done regardless of the settings of MSR[IR] and MSR[DR]. The search is done based on a portion of the logical page number within a segment. All entries matching the search criteria are invalidated.

Block address translation for EA, if any, is ignored.

This is a supervisor-level instruction.

Other registers altered:


- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
OEA	√	√	X

# tlbsync

TLB Synchronize

# tlbsync

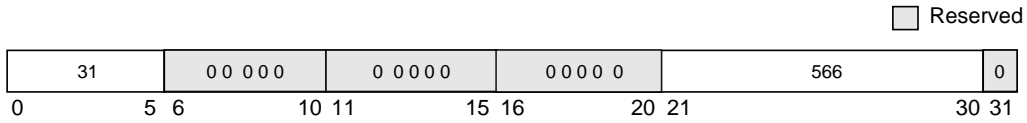

If an implementation sends a broadcast for **tlbie** then it will also send a broadcast for **tlbsync**. Executing a **tlbsync** instruction ensures that all **tlbie** instructions previously executed by the processor executing the **tlbsync** instruction have completed on all other processors. The operation performed by this instruction is treated as a caching-inhibited and guarded data access with respect to the ordering done by **eieio**. This instruction is supervisor-level.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
OEA	√	√	X


# tw

Trap Word

# tw

**tw** TO,rA,rB

Reserved



```

a ← EXTS(rA)
b ← EXTS(rB)
if (a < b) & TO[0] then TRAP
if (a > b) & TO[1] then TRAP
if (a = b) & TO[2] then TRAP
if (a <U b) & TO[3] then TRAP
if (a >U b) & TO[4] then TRAP
    
```

The contents of **rA** are compared with the contents of **rB**. If any bit in the TO field is set and its corresponding condition is met by the result of the comparison, then the system trap handler is invoked.

Other registers altered:

- None

Simplified mnemonics:

<b>tweq</b> rA,rB	equivalent to	<b>tw</b>	<b>4,rA,rB</b>
<b>twlge</b> rA,rB	equivalent to	<b>tw</b>	<b>5,rA,rB</b>
<b>trap</b>	equivalent to	<b>tw</b>	<b>31,0,0</b>

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X




# twi

Trap Word Immediate

# twi

**twi** TO,rA,SIMM



```

a ← EXTS(rA)
if (a < EXTS(SIMM)) & TO[0] then TRAP
if (a > EXTS(SIMM)) & TO[1] then TRAP
if (a = EXTS(SIMM)) & TO[2] then TRAP
if (a <U EXTS(SIMM)) & TO[3] then TRAP
if (a >U EXTS(SIMM)) & TO[4] then TRAP
    
```

The contents of **rA** are compared with the sign-extended value of the **SIMM** field. If any bit in the **TO** field is set and its corresponding condition is met by the result of the comparison, then the system trap handler is invoked.

Other registers altered:

- None

Simplified mnemonics:

<b>twgti</b> rA,value	equivalent to	<b>twi</b> 8,rA,value	
<b>twllel</b> rA,value	equivalent to	<b>twi</b> 6,rA,value	

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D




# XOR<sub>X</sub>

XOR

# XOR<sub>X</sub>

**xor**                                    rA,rS,rB                    (Rc = 0)

**xor.**                                    rA,rS,rB                    (Rc = 1)



$$rA \leftarrow (rS) \oplus (rB)$$

The contents of rS is XORed with the contents of rB and the result is placed into rA.

Other registers altered:

- Condition Register (CR0 field):  
Affected: LT, GT, EQ, SO(if Rc = 1)


PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			X

# xori

XOR Immediate

# xori

**xori**                      rA,rS,UIMM



$$rA \leftarrow (rS) \oplus ((\underline{16})0 \parallel UIMM)$$

The contents of rS are XORed with 0x0000 || UIMM and the result is placed into rA.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D




# xoris

XOR Immediate Shifted

# xoris

**xoris**                    rA,rS,UIMM



$$rA \leftarrow (rS) \oplus (UIMM \parallel (16)0)$$

The contents of rS are XORed with UIMM || 0x0000 and the result is placed into rA.

Other registers altered:

- None

PowerPC Architecture Level	Supervisor Level	Optional	Form
UISA			D

# Appendix

## MPCxxx Instruction Set Listings

This appendix lists the MPCxxx's instruction set. Instructions are sorted by *mnemonic*, opcode, function, and form. Also included in this appendix is a quick reference table that contains general information, such as the architecture level, privilege level, and form.

Note that split fields, which represent the concatenation of sequences from left to right, are shown in lowercase.

### Instructions Sorted by Mnemonic

Table 1 lists the instructions implemented in the MPCxxx in alphabetical order by mnemonic.

Key:

 Reserved bits

**Table 1. Complete Instruction List Sorted by Mnemonic**

Name	0	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>addx</b>	31		D				A						B			OE						266					Rc
<b>addcx</b>	31		D				A						B			OE						10					Rc
<b>addex</b>	31		D				A						B			OE						138					Rc
<b>addi</b>	14		D				A															SIMM					
<b>addic</b>	12		D				A															SIMM					
<b>addic.</b>	13		D				A															SIMM					
<b>addis</b>	15		D				A															SIMM					
<b>addmex</b>	31		D				A						0 0 0 0 0			OE							234				Rc
<b>addzex</b>	31		D				A						0 0 0 0 0			OE							202				Rc
<b>andx</b>	31		S				A						B										28				Rc
<b>andcx</b>	31		S				A						B										60				Rc
<b>andi.</b>	28		S				A															UIMM					
<b>andis.</b>	29		S				A															UIMM					



Name	0	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>bx</b>	18	LI													AA	LK											
<b>bcx</b>	16	BO			BI			BD						AA	LK												
<b>bcctrx</b>	19	BO			BI			0 0 0 0 0			528			LK													
<b>bclrx</b>	19	BO			BI			0 0 0 0 0			16			LK													
<b>cmp</b>	31	crfD	0	L	A			B			0			0													
<b>cmpi</b>	11	crfD	0	L	A			SIMM																			
<b>cmpl</b>	31	crfD	0	L	A			B			32			0													
<b>cmpli</b>	10	crfD	0	L	A			UIMM																			
<b>cntlzwx</b>	31	S			A			0 0 0 0 0			26			Rc													
<b>crand</b>	19	crbD			crbA			crbB			257			0													
<b>crandc</b>	19	crbD			crbA			crbB			129			0													
<b>creqv</b>	19	crbD			crbA			crbB			289			0													
<b>crnand</b>	19	crbD			crbA			crbB			225			0													
<b>crnor</b>	19	crbD			crbA			crbB			33			0													
<b>cror</b>	19	crbD			crbA			crbB			449			0													
<b>crorc</b>	19	crbD			crbA			crbB			417			0													
<b>crxor</b>	19	crbD			crbA			crbB			193			0													
<b>dcbf</b>	31	0 0 0 0 0			A			B			86			0													
<b>dcbi<sup>1</sup></b>	31	0 0 0 0 0			A			B			470			0													
<b>dcbst</b>	31	0 0 0 0 0			A			B			54			0													
<b>dcbt</b>	31	0 0 0 0 0			A			B			278			0													
<b>dcbstst</b>	31	0 0 0 0 0			A			B			246			0													
<b>dcbz</b>	31	0 0 0 0 0			A			B			1014			0													
<b>divwx</b>	31	D			A			B			OE	491			Rc												
<b>divwux</b>	31	D			A			B			OE	459			Rc												
<b>eciwx</b>	31	D			A			B			310			0													
<b>ecowx</b>	31	S			A			B			438			0													
<b>eieio</b>	31	0 0 0 0 0			0 0 0 0 0			0 0 0 0 0			854			0													
<b>eqvx</b>	31	S			A			B			284			Rc													
<b>extsbx</b>	31	S			A			0 0 0 0 0			954			Rc													
<b>extshx</b>	31	S			A			0 0 0 0 0			922			Rc													
<b>icbi</b>	31	0 0 0 0 0			A			B			982			0													
<b>isync</b>	19	0 0 0 0 0			0 0 0 0 0			0 0 0 0 0			150			0													



Name	0	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	
lbz	34			D					A																			
lbzu	35			D					A																			
lbzux	31			D					A					B													119	0
lbzx	31			D					A					B													87	0
lha	42			D					A																			
lhau	43			D					A																			
lhaux	31			D					A					B													375	0
lhax	31			D					A					B													343	0
lhbrx	31			D					A					B													790	0
lhz	40			D					A																			
lhzu	41			D					A																			
lhzux	31			D					A					B													311	0
lhzx	31			D					A					B													279	0
lmw <sup>3</sup>	46			D					A																			
lswi <sup>3</sup>	31			D					A					NB													597	0
lswx <sup>3</sup>	31			D					A					B													533	0
lwarx	31			D					A					B													20	0
lwbrx	31			D					A					B													534	0
lwz	32			D					A																			
lwzu	33			D					A																			
lwzux	31			D					A					B													55	0
lwzx	31			D					A					B													23	0
mcrf	19			crfD		00		crfS		00				00000													0	0
mcrxr	31			crfD		00		00000						00000													512	0
mfcf	31			D				00000						00000													19	0
mfmsr <sup>1</sup>	31			D				00000						00000													83	0
mfspr <sup>2</sup>	31			D										spr													339	0
mfsr <sup>1</sup>	31			D			0		SR					00000													595	0
mfsrin <sup>1</sup>	31			D				00000						B													659	0
mftb	31			D										tbr													371	0
mtrcf	31			S			0		CRM						0												144	0
mtmsr <sup>1</sup>	31			S				00000						00000													146	0
mtspr <sup>2</sup>	31			S										spr													467	0



Name	0	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	
<b>mtsr</b> <sup>1</sup>	31	S	0	SR	00000																210						0	
<b>mtsrin</b> <sup>1</sup>	31	S		00000										B								242						0
<b>mulhw</b> <sub>x</sub>	31	D		A										B		0						75						Rc
<b>mulhw</b> <sub>ux</sub>	31	D		A										B		0						11						Rc
<b>mulli</b>	7	D		A																		SIMM						
<b>mullw</b> <sub>x</sub>	31	D		A										B		OE						235						Rc
<b>nand</b> <sub>x</sub>	31	S		A										B								476						Rc
<b>neg</b> <sub>x</sub>	31	D		A										00000		OE						104						Rc
<b>nor</b> <sub>x</sub>	31	S		A										B								124						Rc
<b>or</b> <sub>x</sub>	31	S		A										B								444						Rc
<b>orc</b> <sub>x</sub>	31	S		A										B								412						Rc
<b>ori</b>	24	S		A																		UIMM						
<b>oris</b>	25	S		A																		UIMM						
<b>rfi</b> <sup>1</sup>	19		00000		00000									00000								50						0
<b>rlwim</b> <sub>x</sub>	20	S		A										SH							MB		ME					Rc
<b>rlwin</b> <sub>m</sub> <sub>x</sub>	21	S		A										SH							MB		ME					Rc
<b>rlwn</b> <sub>m</sub> <sub>x</sub>	23	S		A										B							MB		ME					Rc
<b>sc</b>	17		00000		00000																	0000000000000000					1	0
<b>slw</b> <sub>x</sub>	31	S		A										B								24						Rc
<b>sraw</b> <sub>x</sub>	31	S		A										B								792						Rc
<b>sraw</b> <sub>ix</sub>	31	S		A										SH								824						Rc
<b>srw</b> <sub>x</sub>	31	S		A										B								536						Rc
<b>stb</b>	38	S		A																		d						
<b>stbu</b>	39	S		A																		d						
<b>stb</b> <sub>x</sub>	31	S		A										B								247						0
<b>stb</b> <sub>x</sub>	31	S		A										B								215						0
<b>sth</b>	44	S		A																		d						
<b>sthbr</b> <sub>x</sub>	31	S		A										B								918						0
<b>sth</b> <sub>u</sub>	45	S		A																		d						
<b>sth</b> <sub>ux</sub>	31	S		A										B								439						0
<b>sth</b> <sub>x</sub>	31	S		A										B								407						0
<b>stmw</b> <sup>3</sup>	47	S		A																		d						
<b>stswi</b> <sup>3</sup>	31	S		A										NB								725						0





Name	0	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	
<b>stswx</b> <sup>3</sup>	31		S			A				B											661						0	
<b>stw</b>	36		S			A																						
<b>stwbrx</b>	31		S			A				B												662					0	
<b>stwcx.</b>	31		S			A				B												150					1	
<b>stwu</b>	37		S			A																						
<b>stwux</b>	31		S			A				B												183					0	
<b>stwx</b>	31		S			A				B												151					0	
<b>subfx</b>	31		D			A				B						OE						40					Rc	
<b>subfcx</b>	31		D			A				B						OE						8					Rc	
<b>subfex</b>	31		D			A				B						OE						136					Rc	
<b>subfic</b>	08		D			A																						
<b>subfmex</b>	31		D			A				00000						OE						232					Rc	
<b>subfzex</b>	31		D			A				00000						OE						200					Rc	
<b>sync</b>	31		00000			00000				00000												598					0	
<b>tlbia</b> <sup>1,4</sup>	31		00000			00000				00000												370					0	
<b>tlbie</b> <sup>1,4</sup>	31		00000			00000				B												306					0	
<b>tlbsync</b> <sup>1,4</sup>	31		00000			00000				00000												566					0	
<b>tw</b>	31		TO			A				B												4					0	
<b>twi</b>	03		TO			A																						
<b>xorx</b>	31		S			A				B												316					Rc	
<b>xori</b>	26		S			A																						
<b>xoris</b>	27		S			A																						

- <sup>1</sup> Supervisor-level instruction
- <sup>2</sup> Supervisor- and user-level instruction
- <sup>3</sup> Load and store string or multiple instruction
- <sup>4</sup> PowerPC Optional instruction



## Instructions Sorted by Opcode

Table 2 lists the instructions defined for the MPCxxx in numeric order by opcode.

Key:

Reserved bits

**Table 2. Complete Instruction List Sorted by Opcode**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
twi	000011	TO			A			SIMM																				
mulli	000111	D			A			SIMM																				
subfic	001000	D			A			SIMM																				
cmpli	001010	crfD	0	L	A			UIMM																				
cmpi	001011	crfD	0	L	A			SIMM																				
addic	001100	D			A			SIMM																				
addic.	001101	D			A			SIMM																				
addi	001110	D			A			SIMM																				
addis	001111	D			A			SIMM																				
bcx	010000	BO			BI			BD										AA	LK									
sc	010001	00000			00000			0000000000000000										1	0									
bx	010010	LI										AA	LK															
mcrf	010011	crfD	00	crfS	00	00000			0000000000							0												
bclrx	010011	BO			BI			00000			0000010000							LK										
crnor	010011	crbD			crbA			crbB			0000100001							0										
rfi <sup>1</sup>	010011	00000			00000			00000			0000110010							0										
crandc	010011	crbD			crbA			crbB			0010000001							0										
isync	010011	00000			00000			00000			0010010110							0										
crxor	010011	crbD			crbA			crbB			0011000001							0										
crnand	010011	crbD			crbA			crbB			0011100001							0										
crand	010011	crbD			crbA			crbB			0100000001							0										
creqv	010011	crbD			crbA			crbB			0100100001							0										
crorc	010011	crbD			crbA			crbB			0110100001							0										
cror	010011	crbD			crbA			crbB			0111000001							0										
bcctrx	010011	BO			BI			00000			1000010000							LK										
rlwimix	010100	S			A			SH			MB			ME			Rc											
rlwinmx	010101	S			A			SH			MB			ME			Rc											



Name 0 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31

rlwnmx	0 1 0 1 1 1	S	A	B	MB	ME	Rc		
ori	0 1 1 0 0 0	S	A	UIMM					
oris	0 1 1 0 0 1	S	A	UIMM					
xori	0 1 1 0 1 0	S	A	UIMM					
xoris	0 1 1 0 1 1	S	A	UIMM					
andi.	0 1 1 1 0 0	S	A	UIMM					
andis.	0 1 1 1 0 1	S	A	UIMM					
cmp	0 1 1 1 1 1	crfD	0	L	A	B	0 0 0 0 0 0 0 0 0 0	0	
tw	0 1 1 1 1 1	TO	A	B	0 0 0 0 0 0 0 1 0 0			0	
subfcx	0 1 1 1 1 1	D	A	B	OE	0 0 0 0 0 0 1 0 0 0		Rc	
addcx	0 1 1 1 1 1	D	A	B	OE	0 0 0 0 0 0 1 0 1 0		Rc	
mulhwux	0 1 1 1 1 1	D	A	B	0	0 0 0 0 0 0 1 0 1 1		Rc	
mfcx	0 1 1 1 1 1	D	0 0 0 0 0	0 0 0 0 0	0 0 0 0 0 1 0 0 1 1			0	
lwarx	0 1 1 1 1 1	D	A	B	0 0 0 0 0 1 0 1 0 0			0	
lwzx	0 1 1 1 1 1	D	A	B	0 0 0 0 0 1 0 1 1 1			0	
slwx	0 1 1 1 1 1	S	A	B	0 0 0 0 0 1 1 0 0 0			Rc	
cntlzwx	0 1 1 1 1 1	S	A	0 0 0 0 0	0 0 0 0 0 1 1 0 1 0			Rc	
andx	0 1 1 1 1 1	S	A	B	0 0 0 0 0 1 1 1 0 0			Rc	
cmpl	0 1 1 1 1 1	crfD	0	L	A	B	0 0 0 0 1 0 0 0 0 0		0
subfx	0 1 1 1 1 1	D	A	B	OE	0 0 0 0 1 0 1 0 0 0		Rc	
dcbst	0 1 1 1 1 1	0 0 0 0 0	A	B	0 0 0 0 1 1 0 1 1 0			0	
lwzux	0 1 1 1 1 1	D	A	B	0 0 0 0 1 1 0 1 1 1			0	
andcx	0 1 1 1 1 1	S	A	B	0 0 0 0 1 1 1 1 0 0			Rc	
mulhwx	0 1 1 1 1 1	D	A	B	0	0 0 0 1 0 0 1 0 1 1		Rc	
mfmsr <sup>1</sup>	0 1 1 1 1 1	D	0 0 0 0 0	0 0 0 0 0	0 0 0 1 0 1 0 0 1 1			0	
dcbf	0 1 1 1 1 1	0 0 0 0 0	A	B	0 0 0 1 0 1 0 1 1 0			0	
lbzx	0 1 1 1 1 1	D	A	B	0 0 0 1 0 1 0 1 1 1			0	
negx	0 1 1 1 1 1	D	A	0 0 0 0 0	OE	0 0 0 1 1 0 1 0 0 0		Rc	
lbzux	0 1 1 1 1 1	D	A	B	0 0 0 1 1 1 0 1 1 1			0	
norx	0 1 1 1 1 1	S	A	B	0 0 0 1 1 1 1 1 0 0			Rc	
subfex	0 1 1 1 1 1	D	A	B	OE	0 0 1 0 0 0 1 0 0 0		Rc	
addex	0 1 1 1 1 1	D	A	B	OE	0 0 1 0 0 0 1 0 1 0		Rc	
mtrcf	0 1 1 1 1 1	S	0	CRM	0	0 0 1 0 0 1 0 0 0 0		0	



Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	
mtmsr <sup>1</sup>	011111	S						00000					00000																0
stwcx.	011111	S							A					B															1
stwx	011111	S							A					B															0
stwux	011111	S							A					B															0
subfzex	011111	D							A				00000		OE														Rc
addzex	011111	D							A				00000		OE														Rc
mtsr <sup>1</sup>	011111	S					0		SR					00000															0
stbx	011111	S							A					B															0
subfmex	011111	D							A				00000		OE														Rc
addmex	011111	D							A				00000		OE														Rc
mullwx	011111	D							A					B		OE													Rc
mtsrin <sup>1</sup>	011111	S							00000					B															0
dcbst	011111		00000						A					B															0
stbux	011111	S							A					B															0
addx	011111	D							A					B		OE													Rc
dcbt	011111		00000						A					B															0
lhzx	011111	D							A					B															0
eqvx	011111	S							A					B															Rc
tlbie <sup>1,4</sup>	011111		00000					00000						B															0
eciwx	011111	D							A					B															0
lhzux	011111	D							A					B															0
xorx	011111	S							A					B															Rc
mf spr <sup>2</sup>	011111	D											spr																0
lhax	011111	D							A					B															0
tlbia <sup>1,4</sup>	011111		00000					00000					00000																0
mftb	011111	D												tbr															0
lhaux	011111	D							A					B															0
sthx	011111	S							A					B															0
orcx	011111	S							A					B															Rc
ecowx	011111	S							A					B															0
sthux	011111	S							A					B															0
orx	011111	S							A					B															Rc
divwux	011111	D							A					B		OE													Rc



Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
mtspr <sup>2</sup>	011111	S		spr								0111010011					0											
dcbi <sup>1</sup>	011111	00000		A				B				0111010110					0											
nandx	011111	S		A				B				0111011100					Rc											
divwx	011111	D		A				B				OE	0111101011					Rc										
mcrxr	011111	crfD	00	00000				00000				1000000000					0											
lswx <sup>3</sup>	011111	D		A				B				1000010101					0											
lwbrx	011111	D		A				B				1000010110					0											
lfsx	011111	D		A				B				1000010111					0											
srwx	011111	S		A				B				1000011000					Rc											
tlbsync <sup>1,4</sup>	011111	00000		00000				00000				1000110110					0											
mfsr <sup>1</sup>	011111	D		0	SR			00000				1001010011					0											
lswi <sup>3</sup>	011111	D		A				NB				1001010101					0											
sync	011111	00000		00000				00000				1001010110					0											
lfdx	011111	D		A				B				1001010111					0											
lfdux	011111	D		A				B				1001110111					0											
mfsrin <sup>1</sup>	011111	D		00000				B				1010010011					0											
stswx <sup>3</sup>	011111	S		A				B				1010010101					0											
stwbrx	011111	S		A				B				1010010110					0											
stswi <sup>3</sup>	011111	S		A				NB				1011010101					0											
lhbrx	011111	D		A				B				1100010110					0											
srawx	011111	S		A				B				1100011000					Rc											
srawix	011111	S		A				SH				1100111000					Rc											
eieio	011111	00000		00000				00000				1101010110					0											
sthbrx	011111	S		A				B				1110010110					0											
extshx	011111	S		A				00000				1110011010					Rc											
extsbx	011111	S		A				00000				1110111010					Rc											
icbi	011111	00000		A				B				1111010110					0											
dcbz	011111	00000		A				B				1111110110					0											
lwz	100000	D		A				d																				
lwzu	100001	D		A				d																				
lbz	100010	D		A				d																				
lbzu	100011	D		A				d																				
stw	100100	S		A				d																				



Name    0                    5   6   7   8   9   10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31

<b>stwu</b>	1 0 0 1 0 1	S	A	d
<b>stb</b>	1 0 0 1 1 0	S	A	d
<b>stbu</b>	1 0 0 1 1 1	S	A	d
<b>lhz</b>	1 0 1 0 0 0	D	A	d
<b>lhzu</b>	1 0 1 0 0 1	D	A	d
<b>lha</b>	1 0 1 0 1 0	D	A	d
<b>lhau</b>	1 0 1 0 1 1	D	A	d
<b>sth</b>	1 0 1 1 0 0	S	A	d
<b>sthu</b>	1 0 1 1 0 1	S	A	d
<b>lmw</b> <sup>3</sup>	1 0 1 1 1 0	D	A	d
<b>stmw</b> <sup>3</sup>	1 0 1 1 1 1	S	A	d

<sup>1</sup> Supervisor-level instruction

<sup>2</sup> Supervisor- and user-level instruction

<sup>3</sup> Load and store string or multiple instruction

<sup>4</sup> PowerPC Optional instruction



# Instructions Grouped by Functional Categories

Tables 3 through 30 list the PowerPC instructions grouped by function.

Key:

Reserved bits

**Table 3. Integer Arithmetic Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>addx</b>	31		D				A				B			OE									266					Rc
<b>addcx</b>	31		D				A				B			OE									10					Rc
<b>addex</b>	31		D				A				B			OE									138					Rc
<b>addi</b>	14		D				A				SIMM																	
<b>addic</b>	12		D				A				SIMM																	
<b>addic.</b>	13		D				A				SIMM																	
<b>addis</b>	15		D				A				SIMM																	
<b>addmex</b>	31		D				A				0	0	0	0	0	0		OE					234				Rc	
<b>addzex</b>	31		D				A				0	0	0	0	0	0		OE					202				Rc	
<b>divwx</b>	31		D				A				B			OE									491					Rc
<b>divwux</b>	31		D				A				B			OE									459					Rc
<b>mulhwx</b>	31		D				A				B			0									75					Rc
<b>mulhwux</b>	31		D				A				B			0									11					Rc
<b>mulli</b>	07		D				A				SIMM																	
<b>mullwx</b>	31		D				A				B			OE									235				Rc	
<b>negx</b>	31		D				A				0	0	0	0	0	0		OE					104				Rc	
<b>subfx</b>	31		D				A				B			OE									40					Rc
<b>subfcx</b>	31		D				A				B			OE									8					Rc
<b>subficx</b>	08		D				A				SIMM																	
<b>subfex</b>	31		D				A				B			OE									136					Rc
<b>subfmex</b>	31		D				A				0	0	0	0	0	0		OE					232				Rc	
<b>subfzex</b>	31		D				A				0	0	0	0	0	0		OE					200					Rc

**Table 4. Integer Compare Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>cmp</b>	31	crfD	0	L		A		B	0 0 0 0 0 0 0 0 0 0 0 0										0									
<b>cmpi</b>	11	crfD	0	L		A	SIMM																					
<b>cmpl</b>	31	crfD	0	L		A		B	32										0									
<b>cmpli</b>	10	crfD	0	L		A	UIMM																					

**Table 5. Integer Logical Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>andx</b>	31		S			A		B	28										Rc									
<b>andcx</b>	31		S			A		B	60										Rc									
<b>andi</b>	28		S			A	UIMM																					
<b>andis</b>	29		S			A	UIMM																					
<b>cntlzwx</b>	31		S			A	0 0 0 0 0	26										Rc										
<b>eqvx</b>	31		S			A		B	284										Rc									
<b>extsbx</b>	31		S			A	0 0 0 0 0	954										Rc										
<b>extshx</b>	31		S			A	0 0 0 0 0	922										Rc										
<b>nandx</b>	31		S			A		B	476										Rc									
<b>norx</b>	31		S			A		B	124										Rc									
<b>orx</b>	31		S			A		B	444										Rc									
<b>orcx</b>	31		S			A		B	412										Rc									
<b>ori</b>	24		S			A	UIMM																					
<b>oris</b>	25		S			A	UIMM																					
<b>xorx</b>	31		S			A		B	316										Rc									
<b>xori</b>	26		S			A	UIMM																					
<b>xoris</b>	27		S			A	UIMM																					

**Table 6. Integer Rotate Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>rlwimx</b>	22		S			A		SH		MB		ME																Rc
<b>rlwinmx</b>	20		S			A		SH		MB		ME																Rc
<b>rlwnmx</b>	21		S			A		SH		MB		ME																Rc





**Table 7. Integer Shift Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>slwx</b>	31				S					A					B						24							Rc
<b>srawx</b>	31				S					A					B						792							Rc
<b>srawix</b>	31				S					A					SH						824							Rc
<b>srwx</b>	31				S					A					B						536							Rc

**Table 8. Integer Load Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>lbz</b>	34				D					A											d							
<b>lbzu</b>	35				D					A											d							
<b>lbzux</b>	31				D					A					B						119							0
<b>lbzx</b>	31				D					A					B						87							0
<b>lha</b>	42				D					A											d							
<b>lhau</b>	43				D					A											d							
<b>lhaux</b>	31				D					A					B						375							0
<b>lhax</b>	31				D					A					B						343							0
<b>lhz</b>	40				D					A											d							
<b>lhzu</b>	41				D					A											d							
<b>lhzux</b>	31				D					A					B						311							0
<b>lhzx</b>	31				D					A					B						279							0
<b>lwz</b>	32				D					A											d							
<b>lwzu</b>	33				D					A											d							
<b>lwzux</b>	31				D					A					B						55							0
<b>lwzx</b>	31				D					A					B						23							0

**Table 9. Integer Store Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	
<b>stb</b>	38	S							A																				
<b>stbu</b>	39	S							A																				
<b>stbux</b>	31	S							A						B							247						0	
<b>stbx</b>	31	S							A						B							215						0	
<b>sth</b>	44	S							A																				
<b>sthu</b>	45	S							A																				
<b>sthux</b>	31	S							A						B							439						0	
<b>sthx</b>	31	S							A						B							407						0	
<b>stw</b>	36	S							A																				
<b>stwu</b>	37	S							A																				
<b>stwux</b>	31	S							A						B							183						0	
<b>stwx</b>	31	S							A						B							151						0	

**Table 10. Integer Load and Store with Byte Reverse Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>lhbrx</b>	31	D							A						B							790						0
<b>lwbrx</b>	31	D							A						B							534						0
<b>sthbrx</b>	31	S							A						B							918						0
<b>stwbrx</b>	31	S							A						B							662						0

**Table 11. Integer Load and Store Multiple Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	
<b>lmw</b> <sup>3</sup>	46	D							A																				
<b>stmw</b> <sup>3</sup>	47	S							A																				

**Table 12. Integer Load and Store String Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>lswi</b> <sup>3</sup>	31	D							A						NB							597						0
<b>lswx</b> <sup>3</sup>	31	D							A						B							533						0
<b>stswi</b> <sup>3</sup>	31	S							A						NB							725						0
<b>stswx</b> <sup>3</sup>	31	S							A						B							661						0

**Table 13. Memory Synchronization Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>eieio</b>	31	0 0 0 0 0			0 0 0 0 0			0 0 0 0 0			854						0											
<b>isync</b>	19	0 0 0 0 0			0 0 0 0 0			0 0 0 0 0			150						0											
<b>lwarx</b>	31	D			A			B			20						0											
<b>stwcx.</b>	31	S			A			B			150						1											
<b>sync</b>	31	0 0 0 0 0			0 0 0 0 0			0 0 0 0 0			598						0											

**Table 14. Branch Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>bx</b>	18	LI														AA	LK											
<b>bcx</b>	16	BO			BI			BD						AA	LK													
<b>bcctrx</b>	19	BO			BI			0 0 0 0 0			528						LK											
<b>bclrx</b>	19	BO			BI			0 0 0 0 0			16						LK											

**Table 15. Condition Register Logical Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>crand</b>	19	crbD			crbA			crbB			257						0											
<b>crandc</b>	19	crbD			crbA			crbB			129						0											
<b>creqv</b>	19	crbD			crbA			crbB			289						0											
<b>crnand</b>	19	crbD			crbA			crbB			225						0											
<b>crnor</b>	19	crbD			crbA			crbB			33						0											
<b>cror</b>	19	crbD			crbA			crbB			449						0											
<b>crorc</b>	19	crbD			crbA			crbB			417						0											
<b>crxor</b>	19	crbD			crbA			crbB			193						0											
<b>mcrf</b>	19	crfD	0 0		crfS	0 0		0 0 0 0 0			0 0 0 0 0 0 0 0 0 0						0											

**Table 16. System Linkage Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>rfi</b> <sup>1</sup>	19	0 0 0 0 0			0 0 0 0 0			0 0 0 0 0			50						0											
<b>sc</b>	17	0 0 0 0 0			0 0 0 0 0			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0														1	0					

**Table 17. Trap Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>tw</b>	31	TO			A			B			4						0											
<b>twi</b>	03	TO			A			SIMM																				

**Table 18. Processor Control Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>mcrxr</b>	31	crfS	00	00000			00000			512						0												
<b>mfcr</b>	31	D			00000			00000			19						0											
<b>mfmsr</b> <sup>1</sup>	31	D			00000			00000			83						0											
<b>mf spr</b> <sup>2</sup>	31	D			spr						339						0											
<b>mftb</b>	31	D			tpr						371						0											
<b>mtcrf</b>	31	S			0	CRM			0	144						0												
<b>mtmsr</b> <sup>1</sup>	31	S			00000			00000			146						0											
<b>mts spr</b> <sup>2</sup>	31	D			spr						467						0											

**Table 19. Cache Management Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>dcbf</b>	31	00000			A			B			86						0											
<b>dcbi</b> <sup>1</sup>	31	00000			A			B			470						0											
<b>dcbst</b>	31	00000			A			B			54						0											
<b>dcbt</b>	31	00000			A			B			278						0											
<b>dcbtst</b>	31	00000			A			B			246						0											
<b>dcbz</b>	31	00000			A			B			1014						0											
<b>icbi</b>	31	00000			A			B			982						0											

**Table 20. Lookaside Buffer Management Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>tlbia</b> <sup>1,4</sup>	31	00000			00000			00000			370						0											
<b>tlbie</b> <sup>1,4</sup>	31	00000			00000			B			306						0											
<b>tlbsync</b> <sup>1,4</sup>	31	00000			00000			00000			566						0											

**Table 21. External Control Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	
<b>eciwx</b>	31			D						A					B														0
<b>ecowx</b>	31			S						A					B														0

<sup>1</sup> Supervisor-level instruction

<sup>2</sup> Supervisor- and user-level instruction

<sup>3</sup> Load and store string or multiple instruction

|





Specific Instructions

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31		
<b>addi</b>	14				D						A																		SIMM	
<b>addic</b>	12				D						A																		SIMM	
<b>addic.</b>	13				D						A																		SIMM	
<b>addis</b>	15				D						A																		SIMM	
<b>andi.</b>	28				S						A																		UIMM	
<b>andis.</b>	29				S						A																		UIMM	
<b>cmpi</b>	11			crfD		0		L			A																		SIMM	
<b>cmpli</b>	10			crfD		0		L			A																			UIMM
<b>lbz</b>	34				D						A																		d	
<b>lbzu</b>	35				D						A																			d
<b>lha</b>	42				D						A																			d
<b>lhau</b>	43				D						A																			d
<b>lhz</b>	40				D						A																			d
<b>lhzu</b>	41				D						A																			d
<b>lmw</b> <sup>3</sup>	46				D						A																			d
<b>lwz</b>	32				D						A																			d
<b>lwzu</b>	33				D						A																			d
<b>mulli</b>	7				D						A																			SIMM
<b>ori</b>	24				S						A																			UIMM
<b>oris</b>	25				S						A																			UIMM
<b>stb</b>	38				S						A																			d
<b>stbu</b>	39				S						A																			d
<b>sth</b>	44				S						A																			d
<b>sthu</b>	45				S						A																			d
<b>stmw</b> <sup>3</sup>	47				S						A																			d
<b>stw</b>	36				S						A																			d
<b>stwu</b>	37				S						A																			d
<b>subfic</b>	08				D						A																			SIMM
<b>twi</b>	03				TO						A																			SIMM
<b>xori</b>	26				S						A																			UIMM
<b>xoris</b>	27				S						A																			UIMM

Table 27 DS-Form

**Table 28. X-Form**

OPCD	D		A	B	XO	0	
OPCD	D		A	NB	XO	0	
OPCD	D		00000	B	XO	0	
OPCD	D		00000	00000	XO	0	
OPCD	D	0	SR	00000	XO	0	
OPCD	S		A	B	XO	Rc	
OPCD	S		A	B	XO	1	
OPCD	S		A	B	XO	0	
OPCD	S		A	NB	XO	0	
OPCD	S		A	00000	XO	Rc	
OPCD	S		00000	B	XO	0	
OPCD	S		00000	00000	XO	0	
OPCD	S	0	SR	00000	XO	0	
OPCD	S		A	SH	XO	Rc	
OPCD	crfD	0	L	A	B	XO	0
OPCD	crfD	00		A	B	XO	0
OPCD	crfD	00	crfS	00	00000	XO	0
OPCD	crfD	00	00000	00000	XO	0	
OPCD	crfD	00	00000	IMM	0	XO	Rc
OPCD	TO		A	B	XO	0	
OPCD	D		00000	B	XO	Rc	
OPCD	D		00000	00000	XO	Rc	
OPCD	crbD		00000	00000	XO	Rc	
OPCD		00000	A	B	XO	0	
OPCD		00000	00000	B	XO	0	
OPCD		00000	00000	00000	XO	0	

**Specific Instructions**

<b>andx</b>	31	S		A	B	28	Rc
<b>andcx</b>	31	S		A	B	60	Rc
<b>cmp</b>	31	crfD	0	L	A	B	0
<b>cmpl</b>	31	crfD	0	L	A	B	32
<b>cntlzwx</b>	31	S		A	00000	26	Rc
<b>dcbf</b>	31		00000	A	B	86	0



dcbi <sup>1</sup>	31	00000	A	B	470	0	
dcbst	31	00000	A	B	54	0	
dcbt	31	00000	A	B	278	0	
dcbtst	31	00000	A	B	246	0	
dcbz	31	00000	A	B	1014	0	
eciwx	31	D	A	B	310	0	
ecowx	31	S	A	B	438	0	
eieio	31	00000	00000	00000	854	0	
eqvx	31	S	A	B	284	Rc	
extsbx	31	S	A	00000	954	Rc	
extshx	31	S	A	00000	922	Rc	
icbi	31	00000	A	B	982	0	
lbzux	31	D	A	B	119	0	
lbzx	31	D	A	B	87	0	
lhaux	31	D	A	B	375	0	
lhax	31	D	A	B	343	0	
lhbrx	31	D	A	B	790	0	
lhzux	31	D	A	B	311	0	
lhzx	31	D	A	B	279	0	
lswi <sup>3</sup>	31	D	A	NB	597	0	
lswx <sup>3</sup>	31	D	A	B	533	0	
lwarx	31	D	A	B	20	0	
lwbrx	31	D	A	B	534	0	
lwzux	31	D	A	B	55	0	
lwzx	31	D	A	B	23	0	
mcrxr	31	crfD	00	00000	00000	512	0
mfcrr	31	D	00000	00000	19	0	
mfmsr <sup>1</sup>	31	D	00000	00000	83	0	
mfsr <sup>1</sup>	31	D	0	SR	00000	595	0
mfsrin <sup>1</sup>	31	D	00000	B	659	0	
mtmsr <sup>1</sup>	31	S	00000	00000	146	0	
mtsr <sup>1</sup>	31	S	0	SR	00000	210	0
mtsrin <sup>1</sup>	31	S	00000	B	242	0	
nandx	31	S	A	B	476	Rc	
norx	31	S	A	B	124	Rc	



<b>orx</b>	31	S	A	B	444	Rc
<b>orcx</b>	31	S	A	B	412	Rc
<b>slwx</b>	31	S	A	B	24	Rc
<b>srawx</b>	31	S	A	B	792	Rc
<b>srawix</b>	31	S	A	SH	824	Rc
<b>srwx</b>	31	S	A	B	536	Rc
<b>stbux</b>	31	S	A	B	247	0
<b>stbx</b>	31	S	A	B	215	0
<b>sthbrx</b>	31	S	A	B	918	0
<b>sthux</b>	31	S	A	B	439	0
<b>sthx</b>	31	S	A	B	407	0
<b>stswi</b> <sup>3</sup>	31	S	A	NB	725	0
<b>stswx</b> <sup>3</sup>	31	S	A	B	661	0
<b>stwbrx</b>	31	S	A	B	662	0
<b>stwcx.</b>	31	S	A	B	150	1
<b>stwux</b>	31	S	A	B	183	0
<b>stwx</b>	31	S	A	B	151	0
<b>sync</b>	31	00000	00000	00000	598	0
<b>tlbia</b> <sup>1,4</sup>	31	00000	00000	00000	370	0
<b>tlbie</b> <sup>1,4</sup>	31	00000	00000	B	306	0
<b>tlbsync</b> <sup>1,4</sup>	31	00000	00000	00000	566	0
<b>tw</b>	31	TO	A	B	4	0
<b>xorx</b>	31	S	A	B	316	Rc

**Table 29. XL-Form**

OPCD	BO	BI	00000	XO	LK		
OPCD	crbD	crbA	crbB	XO	0		
OPCD	crfD	00	crfS	00	00000	XO	0
OPCD	00000	00000	00000	XO	0		

**Specific Instructions**

Name 0 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31

<b>bcctrx</b>	19	BO	BI	00000	528	LK
<b>bclrx</b>	19	BO	BI	00000	16	LK
<b>crand</b>	19	crbD	crbA	crbB	257	0

<b>crandc</b>	19	crbD		crbA		crbB		129	0
<b>creqv</b>	19	crbD		crbA		crbB		289	0
<b>crnand</b>	19	crbD		crbA		crbB		225	0
<b>crnor</b>	19	crbD		crbA		crbB		33	0
<b>cror</b>	19	crbD		crbA		crbB		449	0
<b>crorc</b>	19	crbD		crbA		crbB		417	0
<b>crxor</b>	19	crbD		crbA		crbB		193	0
<b>isync</b>	19	0 0 0 0 0		0 0 0 0 0		0 0 0 0 0		150	0
<b>mcrf</b>	19	crfD	0 0	crfS	0 0	0 0 0 0 0		0	0
<b>rfi</b> <sup>1</sup>	19	0 0 0 0 0		0 0 0 0 0		0 0 0 0 0		50	0



**Table 30. XFX-Form**

OPCD	D	spr				XO	0	
OPCD	D	0	CRM			0	XO	0
OPCD	S	spr				XO	0	
OPCD	D	tbr				XO	0	

**Specific Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>mfspr</b> <sup>2</sup>	31	D	spr				339				0																	
<b>mtfb</b>	31	D	tbr				371				0																	
<b>mtrcf</b>	31	S	0	CRM			0	144				0																
<b>mtspr</b> <sup>2</sup>	31	D	spr				467				0																	

**Table 31. XO-Form**

OPCD	D	A	B	OE	XO	Rc
OPCD	D	A	B	0	XO	Rc
OPCD	D	A	00000	OE	XO	Rc

**Specific Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
<b>addx</b>	31	D	A	B	OE	266				Rc																		
<b>addcx</b>	31	D	A	B	OE	10				Rc																		
<b>addex</b>	31	D	A	B	OE	138				Rc																		
<b>addmex</b>	31	D	A	00000	OE	234				Rc																		
<b>addzex</b>	31	D	A	00000	OE	202				Rc																		
<b>divwx</b>	31	D	A	B	OE	491				Rc																		
<b>divwux</b>	31	D	A	B	OE	459				Rc																		
<b>mulhwx</b>	31	D	A	B	0	75				Rc																		
<b>mulhwux</b>	31	D	A	B	0	11				Rc																		
<b>mullwx</b>	31	D	A	B	OE	235				Rc																		
<b>negx</b>	31	D	A	00000	OE	104				Rc																		
<b>subfx</b>	31	D	A	B	OE	40				Rc																		
<b>subfcx</b>	31	D	A	B	OE	8				Rc																		
<b>subfex</b>	31	D	A	B	OE	136				Rc																		
<b>subfmex</b>	31	D	A	00000	OE	232				Rc																		
<b>subfzex</b>	31	D	A	00000	OE	200				Rc																		

**Table 32. M-Form**

OPCD	S	A	SH	MB	ME	Rc
OPCD	S	A	B	MB	ME	Rc

**Specific Instructions**

Name	0	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	
<b>rlwimix</b>	20	S	A	SH	MB	ME	Rc																						
<b>rlwinmx</b>	21	S	A	SH	MB	ME	Rc																						
<b>rlwnmx</b>	23	S	A	B	MB	ME	Rc																						

- <sup>1</sup> Supervisor-level instruction
- <sup>2</sup> Supervisor- and user-level instruction
- <sup>3</sup> Load and store string or multiple instruction
- <sup>4</sup> PowerPC Optional instruction

# Instruction Set Legend

Table 33 provides general information on the MPCxxx instruction set (such as the architectural level, privilege level, and form).

**Table 33. MPCxxx Instruction Set Legend**

	UISA	VEA	OEA	Supervisor Level		Optional	Form
<b>addx</b>	√						XO
<b>addcx</b>	√						XO
<b>addex</b>	√						XO
<b>addi</b>	√						D
<b>addic</b>	√						D
<b>addic.</b>	√						D
<b>addis</b>	√						D
<b>addmex</b>	√						XO
<b>addzex</b>	√						XO
<b>andx</b>	√						X
<b>andcx</b>	√						X
<b>andi.</b>	√						D
<b>andis.</b>	√						D
<b>bx</b>	√						I
<b>bcx</b>	√						B
<b>bcctrx</b>	√						XL
<b>bclrx</b>	√						XL
<b>cmp</b>	√						X
<b>cmpi</b>	√						D
<b>cmpl</b>	√						X
<b>cmpli</b>	√						D
<b>cntlzwx</b>	√						X
<b>crand</b>	√						XL
<b>crandc</b>	√						XL
<b>creqv</b>	√						XL
<b>crnand</b>	√						XL
<b>crnor</b>	√						XL



	UISA	VEA	OEA	Supervisor Level		Optional	Form
<b>cror</b>	√						XL
<b>crorc</b>	√						XL
<b>crxor</b>	√						XL
<b>dcbf</b>		√					X
<b>dcbi</b>			√	√			X
<b>dcbst</b>		√					X
<b>dcbt</b>		√					X
<b>dcbtst</b>		√					X
<b>dcbz</b>		√					X
<b>divwx</b>	√						XO
<b>divwux</b>	√						XO
<b>eciwx</b>		√				√	X
<b>ecowx</b>		√				√	X
<b>eieio</b>		√					X
<b>eqvx</b>	√						X
<b>extsbx</b>	√						X
<b>extshx</b>	√						X

	UISA	VEA	OEA	Supervisor Level		Optional	Form
<b>icbi</b>		√					X
<b>isync</b>		√					XL
<b>lbz</b>	√						D
<b>lbzu</b>	√						D
<b>lbzux</b>	√						X
<b>lbzx</b>	√						X

	UISA	VEA	OEA	Supervisor Level		Optional	Form
<b>lha</b>	√						D
<b>lhau</b>	√						D
<b>lhax</b>	√						X
<b>lhax</b>	√						X
<b>lhbrx</b>	√						X
<b>lhz</b>	√						D
<b>lhzu</b>	√						D

lhzux	√						X
lhzx	√						X
lmw <sup>2</sup>	√						D
lswi <sup>2</sup>	√						X
lswx <sup>2</sup>	√						X
lwarx	√						X
lwbrx	√						X
lwz	√						D
lwzu	√						D
lwzux	√						X
lwzx	√						X
mcrf	√						XL
mcrxr	√						X
mfcrl	√						X
mfmsr			√	√			X
mfmspr <sup>1</sup>	√		√	√			XFx
mfsr			√	√			X
mfsr <sup>3</sup>			√	√		√	X
mfsrin			√	√			X
mfsrin <sup>3</sup>			√	√		√	X
	UISA	VEA	OEA	Supervisor Level		Optional	Form
mftb		√					XFx
mtcrf	√						XFx
mtmsr			√	√			X
mtmsr <sup>3</sup>			√	√		√	X
mtspr <sup>1</sup>	√		√	√			XFx
mtsr			√	√			X
mtsr <sup>3</sup>			√	√		√	X
mtsrin			√	√			X
mtsrin <sup>3</sup>			√	√		√	X
mulhwx	√						XO
mulhwux	√						XO
mulli	√						D
mullwx	√						XO



<b>nandx</b>	√							X
<b>negx</b>	√							XO
<b>norx</b>	√							X
<b>orx</b>	√							X
<b>orcx</b>	√							X
<b>ori</b>	√							D
<b>oris</b>	√							D
<b>rfi</b>			√	√				XL
<b>rfi<sup>3</sup></b>			√	√			√	XL
<b>rlwimix</b>	√							M
<b>rlwinmx</b>	√							M
<b>rlwnmx</b>	√							M

UISA      VEA      OEA      Supervisor Level      Optional      Form

<b>sc</b>	√		√					SC
<b>slwx</b>	√							X
<b>srawx</b>	√							X
<b>srawix</b>	√							X
<b>srwx</b>	√							X
<b>stb</b>	√							D
<b>stbu</b>	√							D
<b>stbux</b>	√							X
<b>stbx</b>	√							X
<b>sth</b>	√							D
<b>sthbrx</b>	√							X
<b>sthu</b>	√							D
<b>sthux</b>	√							X
<b>sthx</b>	√							X

UISA      VEA      OEA      Supervisor Level      Optional      Form

<b>stmw<sup>2</sup></b>	√							D
<b>stswi<sup>2</sup></b>	√							X
<b>stswx<sup>2</sup></b>	√							X
<b>stw</b>	√							D
<b>stwbrx</b>	√							X
<b>stwcx.</b>	√							X

<b>stwu</b>	√							D
<b>stwux</b>	√							X
<b>stwx</b>	√							X
<b>subfx</b>	√							XO
<b>subfcx</b>	√							XO
<b>subfex</b>	√							XO
<b>subfic</b>	√							D
<b>subfmex</b>	√							XO
<b>subfzex</b>	√							XO
<b>sync</b>	√							X
<b>tlbia</b>			√	√			√	X
<b>tlbie</b>			√	√			√	X
<b>tlbsync</b>			√	√				X
<b>tw</b>	√							X
<b>twi</b>	√							D
<b>xorx</b>	√							X
<b>xori</b>	√							D
<b>xoris</b>	√							D

<sup>1</sup> Supervisor- and user-level instruction

<sup>2</sup> Load and store string or multiple instruction

<sup>3</sup> PowerPC Optional instruction