



BOTTOM VIEW

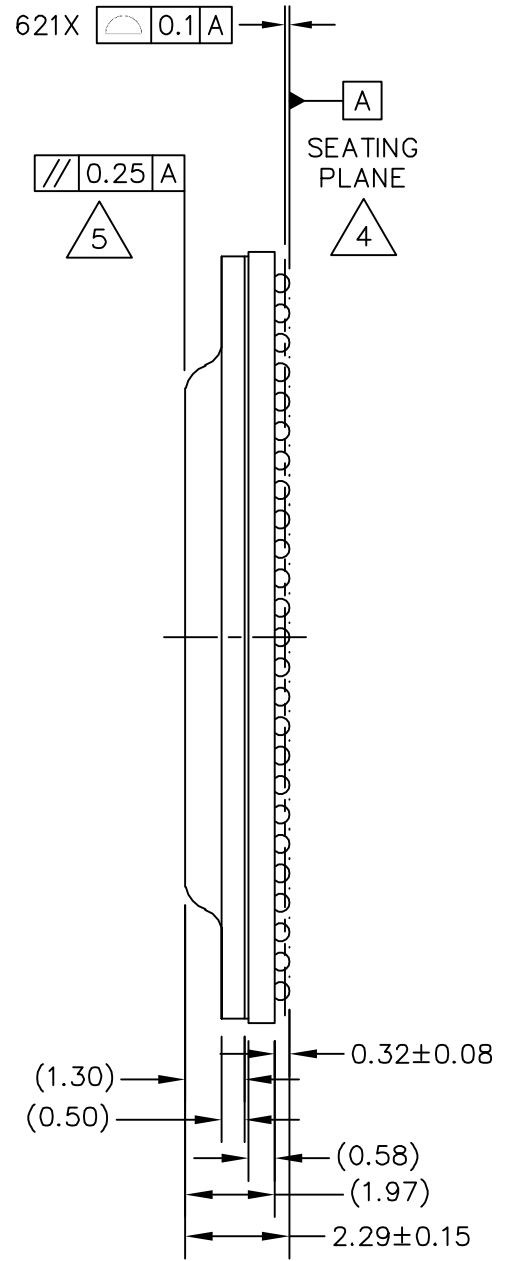

VIEW D-D



© NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED	MECHANICAL OUTLINE	PRINT VERSION NOT TO SCALE
TITLE: FCPBGA, WITH LID, 17 X 17 X 2.29 PKG, 0.65 MM PITCH, 621 I/O	DOCUMENT NO: 98ASA00819D	REV: B
	STANDARD: NON-JEDEC	
	SOT1840-1	09 AUG 2016



NOTES:

1. ALL DIMENSIONS IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
3. MAXIMUM SOLDER BALL DIAMETER MEASURED PARALLEL TO DATUM A.
4. DATUM A, THE SEATING PLANE, IS DETERMINED BY THE SPHERICAL CROWNS OF THE SOLDER BALLS.
5. PARALLELISM MEASUREMENT SHALL EXCLUDE ANY EFFECT OF MARK ON TOP SURFACE OF PACKAGE.
6. ALL DIMENSIONS ARE SYMMETRIC ACROSS THE PACKAGE CENTER LINES, UNLESS DIMENSIONED OTHERWISE.
7. PIN 1 THRU HOLE SHALL BE CENTERED WITHIN FOOT AREA.
8. 17.15MM MAXIMUM PACKAGE ASSEMBLY (LID + LAMINATE) X AND Y.
9. LID OVERHANG ON SUBSTRATE NOT TO EXCEED 0.10MM.

© NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED	MECHANICAL OUTLINE	PRINT VERSION NOT TO SCALE	
TITLE: FCPBGA, WITH LID, 17 X 17 X 2.29 PKG, 0.65 MM PITCH, 621 I/O	DOCUMENT NO: 98ASA00819D		REV: B
	STANDARD: NON-JEDEC		
	SOT1840-1		09 AUG 2016